



Continuous Connector Wet (18/2 Gauge Wire)
LLED8000-CC-WET (3" Standard)
LLED8000-CC-WET-X (X = Specify Length)

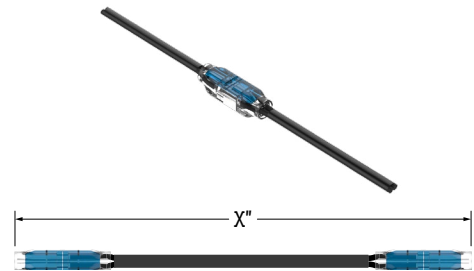


Continuous Connector Black Wet (18/2 Gauge Wire with Black Jacket)
LLED8000-CC-BK-WET (3" Standard)
LLED8000-CC-BK-WET-X (X = Specify Length)

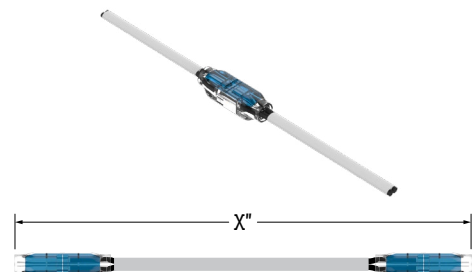


Continuous Connector White Wet (18/2 Gauge Wire with White Jacket)
LLED8000-CC-WH-WET (3" Standard)
LLED8000-CC-WH-WET-X (X = Specify Length)


1. Make connections between fixtures using wet location connectors. Slide shrink tube over wires and connector. Part wires 3/4" for insertion into the connector.

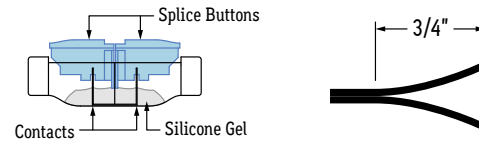


2. Push wires into connector until they stop at the center point. Repeat process for other side.
Note: Positive wire has ridges on the jacket. Neutral wire has a smooth jacket.

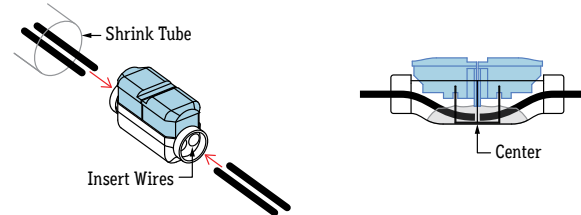

3. Use pliers to push splice buttons down until they sever the wire and snap into place.

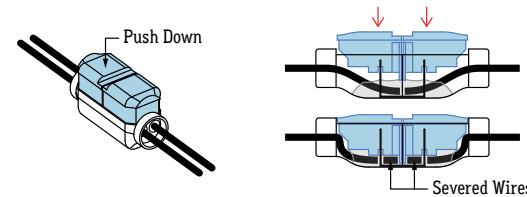

4. Slide shrink tube over connector and apply heat. The shrink tube will shrink down around the connector. Apply silicone around the ends to create a stronger seal.

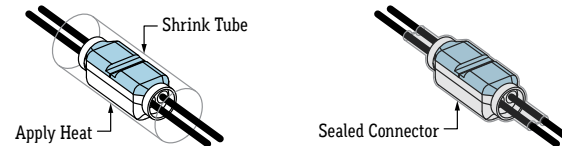

2. Perform continuity test before connecting fixture to power source.

Link: <http://www.calilighting.com/assets/pdf/lipleds/LLED8000-Continuity-Test.pdf>

6. Position connectors as needed.

