




CALIFORNIA  
ACCENT  
LIGHTING  
INC

STL6550 | INSTALLATION

Overview

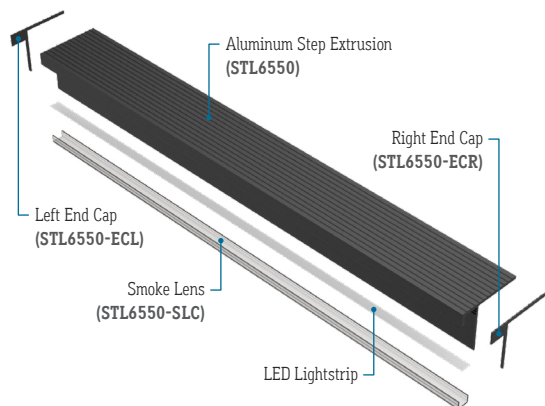

## FEATURES

APPLICATIONS	Step Lighting
LAMP TYPE	LEDs
CRI	> 95
LENS	Clear, Smoke, or Frosted
VIEWING ANGLE	120°
MOUNTING	Adhesive / Mounting Channel
WEIGHT	0.23 lbs per Foot
CONSTRUCTION	Aluminum Extrusion
FINISH	Anodized Black
LENGTH	Built to Order
LISTING	Dry Location Only UL2108, CSA C22.2 #9 UL8750, CSA250
INSTALLATION	Link to Installation Instructions
ELECTRICAL	
DIMMING	Forward Phase, 0-10V, Lutron, DALI, DMX
MAXIMUM RUN (Based on 5 Amps)	36' (1.5W, 2.5W) 33' (3.6W)
MAXIMUM RUN (Based on 4 Amps for Class II)	36' (1.5W, 2.5W) 26' (3.6W)
VOLTAGE	24VDC
DRIVER	Remote (Sold Separately)
TEMPERATURE RATINGS	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)


## PRODUCT INFORMATION

- Step extrusion for step lighting
- 24 Volts DC for easy and safe installation
- Choose from a variety of LED colors and whites
- Long life, energy efficient LEDs
- Indoor installations are field cuttable
- Can be ordered to specific lengths longer than 4" for easier installation
- Lead wires are typically 36" long and exit on one end
- Available with raceway and end caps


## READ ENTIRE GUIDE BEFORE STARTING INSTALLATION

**IMPORTANT NOTICE:** VERIFY CORRECT LUMINAIRE WAS RECEIVED WITH CORRECT COLOR TEMPERATURE, VOLTAGE, AND WATTAGE BEFORE CUTTING OR INSTALLING. CALI WILL NOT BE RESPONSIBLE IF INCORRECT LUMINAIRE IS INSTALLED.

### END VIEW



### MOUNTING OPTION



**Concrete or Wood Steps**  
Note: Do not install StepLITE on top of carpet.  
Install directly onto concrete or wood floor.

## ELECTRICAL

- StepLITE products require a 24 Volt DC remote transFORMER (TRA or TRA-E)
- To calculate transformer size, determine Watts per Foot.  
**Example:** 1.5W per Foot
- Determine Length in Feet.  
**Example:** 30'
- Calculate Load: Multiply Watts per Foot x Length in Feet  
**Example:** 1.5W x 30' = 45W
- Choose a transFORMER from catalog.  
**Example:** TRA50
- Determine maximum distance using Maximum Wire Length Table on transformer page.  
**Example:** 45 watts is between 40W and 60W. Using #14 wire, maximum distance is 37' from transFORMER to first LED

## INSTALLATION RECOMMENDATIONS

- StepLITE LED tape must be mechanically attached directly to mounting surface using mounting channels.
- Conduit raceway should be sleeved at one end for low voltage wires going to transFORMER.

## INSTALLATION TOOLS REQUIRED

- Electric Hammer Drill
- 14.4 to 28 Volt Cordless Drill
- Phillips Bits
- Utility Knife
- Electrical Cord
- Marker
- Wire Stripper
- Long Nose Pliers
- Drill Bits - Concrete or Wood
- Electrical Three Ways
- Safety Glasses
- Measuring Tape
- Chalk Line

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.



CALIFORNIA  
ACCENT  
LIGHTING  
INC

STL6550 | INSTALLATION

Product Care

## WARNING


When using StepLITE for any application, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and personal injury.

StepLITE must be installed in accordance with the NEC or CEC as applicable.

CALI will not be responsible for any damage or malfunction caused by the following:

- Ensure power is off before installation begins, during replacements, additions, or repairs.
- Do not use StepLITE if damaged, such as broken boards, loose connections, or frayed wire insulation. Inspect before installing.
- Do not install StepLITE in hazardous locations.
- Do not cover StepLITE with any material, as it may cause LEDs to overheat, melt, or ignite. (Fig. 1)
- Do not paint on or over fixture lens or LEDs.  
Paint or any other substance on lens or LEDs will cause a shift in color temperature.
- Soffit must be evenly painted with a neutral white to avoid color shift.
- Do not modify StepLITE in the field.
- Do not overlap StepLITE luminaires in any way.
- Only use StepLITE with specified rated voltages. Do not exceed the specified voltage for any StepLITE luminaire.
- Do not use StepLITE extrusion as a raceway for additional wire. Non-factory feed through wires inside StepLITE will void warranty.
- Ground Fault Circuit Interrupter (GFCI) protections should be provided on circuits or outlets when StepLITE is used for outdoor applications.
- Surge protector must be set up for electrical power system to avoid damaging StepLITE lighting system.
- Do not connect wires together, follow provided wiring diagrams.
- Do not cut wire while energized.
- Do not connect StepLITE lightstrip to power source while spooled or coiled. (Fig. 2)
- Do not exceed maximum run lengths.
- Do not mount StepLITE with staples, nails, or like means that might damage the insulation.  
Mount with double-sided tape and mounting clips.
- Do not install mounting clips over LED diodes. (Fig. 3)
- Do not penetrate StepLITE lightstrip with any foreign object. (Fig. 4)
- Do not mount StepLITE inside tanks or enclosures of any kind.
- Do not use improper screw head type on mounting clips. It will cause the mounting clip to open up and become dysfunctional.
- Do not modify mounting clips.
- Do not mount fixture with less than the minimum number of mounting clips required.  
See mounting clips section for details.
- Do not force StepLITE into a space that is too small.
- Do not force StepLITE with cord grip into soffit.
- Do not install StepLITE at an angle within a cove. Only install fixtures straight within a cove.
- Do not bend extrusion around radius.
- Do not submerge dry or wet location StepLITE in any liquid.
- Do not install wet location in outdoor coves without proper drainage. (Fig. 5)
- Do not install StepLITE in any area that is continuously exposed to flowing or pooling water, such as underneath drain pipes, sprinklers, fountains, misters, etc.
- Do not install connectors without shrink tube for wet location. (Fig. 6)
- Do not use a lighter or open flame to heat shrink tube. (Fig. 7)
- Do not cut, puncture, or penetrate StepLITE aluminum housing, end caps, or lens covers.
- Do not drop, bang, or rest weight upon StepLITE.
- Do not apply excessive pressure to any part of StepLITE lightstrip or LEDs. (Fig. 8)
- Do not bend StepLITE power cord or continuous connector past permitted bend radius.  
Bending past permitted bend radius will break the seal of the cordgrip or damage the insulation. 1.5" minimum bend radius. (Fig. 9)
- Do not install StepLITE lightstrip in a zig zag fashion. (Fig. 10)
- Do not fold, crease, or twist StepLITE lightstrip. (Fig. 11)
- Do not bend lightstrip along a horizontal plane. (Fig. 12)
- Do not overlap StepLITE at any location. (Fig. 13)
- Do not cross or overlap extrusions and twist lightstrip to overlap. (Fig. 14)
- Do not install StepLITE in places where the power cord is subject to continuous flexing.
- Do not twist continuous connector or power cord.
- Do not hold, carry, or suspend StepLITE by the power cord.
- Do not install StepLITE on ceilings without mounting clips. (Fig. 15)

## FIGURES

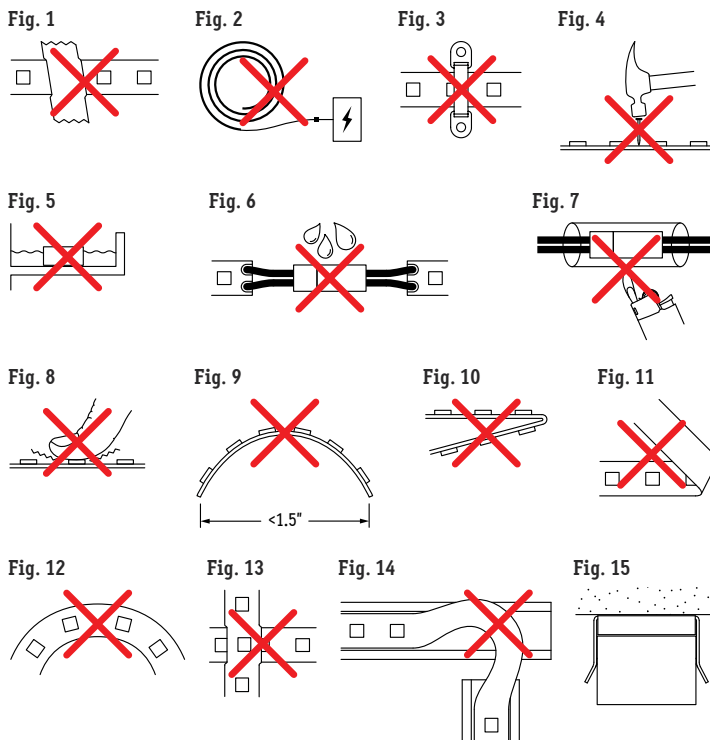

## CLEANING MATERIALS

The use of solvents and/or cleaners which are not compatible with polycarbonate will result in the softening, crazing, and/or cracking of the plastic part. This is especially true of polycarbonate lamps and mounting bases which may be under stress in their normal applications.

## COMPATIBLE WITH POLYCARBONATE

- Mild soap and water
- Mineral Spirits
- Isobutyl alcohol
- VM and P Naphtha
- Varsol No.2
- Mexane
- Freone TF and TE-35
- Ethanol
- Dirtex
- 2% Sol. Reg. Joy
- 10% Sol Bon Ami
- White Kerosene
- Methyl alcohol
- Heptane
- Petroleum Ether/65 degrees C
- Isopropyl alcohol
- Lacryl PCL-2035 polycarbonate cleaner

## NOT COMPATIBLE WITH POLYCARBONATE

- Trichlor
- Gasoline
- Liquid Detergents
- Acetone
- Carbon Tetrachloride
- Pink Lux (Phosphate free)
- Triclene
- Chlorinated Hydrocarbons
- #1 & #3 denatured alcohol
- Methyl Ethyl Keytone (MEK)
- Texize-8006, 8129, 8758
- MIBK
- Liquid Cleaner - 8211
- Toluol
- Agitene
- Benzol
- Ajax
- Kleenol Plastics
- Lysol
- Stanisol Naphtha
- Oils
- Lemon Joy (phosphate free)
- Diversol
- Lestoil

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.





CALIFORNIA  
ACCENT  
LIGHTING  
INC

# STL6550 | INSTALLATION

## Dimming Protocol & Wiring Diagrams (Lutron Hi-lume)


### 2-WIRE DIMMING PROTOCOL (Lutron LTEA)

#### Technical Requirements For Control Equipment (2-Wire Dimming)


- The Hi-lume 1% 2-Wire LED Driver (LTEA2W) is a high performance LED driver that provides a smooth, continuous, flicker-free 1% dimming for virtually any LED fixture. Primary voltage is 120V and secondary side is 12VDC or 24VDC. A rated life time of 50,000 hours @tc -149°F (65°C). Inrush current: < 2A. Minimum operating temperature ta = 32°F (0°C).
- Continuous, flicker-free dimming from 100% to 1%. Guaranteed compatibility with selected Maestro Wireless, RadioRA 2, HomeWorks QS, GRAFIK Eye QS, GRAFIK Systems, Quantum, and C•L Dimmers.

### LTEA 2-WIRE WIRING DIAGRAMS (JA8 Compliant)

#### Controls Requiring Neutral

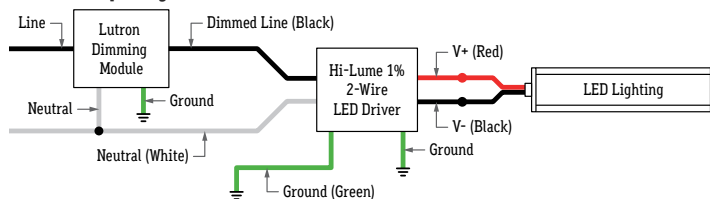

#### Controls Not Requiring Neutral

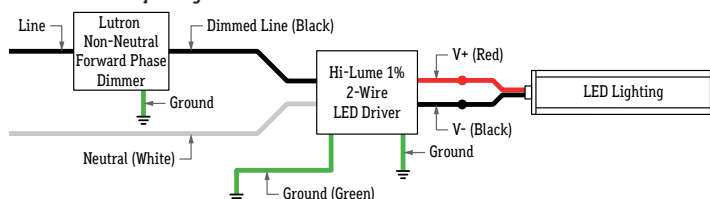


### 3-WIRE DIMMING PROTOCOL (Lutron L3DA)

#### Technical Requirements For Control Equipment (3-Wire Dimming)


- Hi-lume 1% EcoSystem/3-Wire Driver (L3DA) is a high-performance LED driver that provides smooth, continuous 1% dimming for virtually any LED fixture, primary voltage is 120–277 V~ at 50/60 Hz and secondary side is 12VDC or 24VDC. A rated life time of 50,000 hours @tc -149°F (65°C). Inrush current: < 2A. Minimum operating temperature ta = 32°F (0°C).
- Continuous, flicker-free dimming from 100% to 1%. Compatible with Energi Savr Node unit with EcoSystem, GRAFIK Eye QS control unit, PowPak dimming module with EcoSystem, and Quantum systems, allowing for integration into a planned or existing EcoSystem lighting control solution. Standard 3-wire, line-voltage phase-control technology for consistent dimming performance and compatibility with all Lutron 3-wire fluorescent controls.

### L3DA 3-WIRE WIRING DIAGRAMS

#### 3-Wire Controls

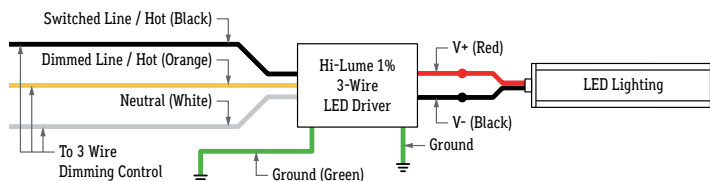

#### EcoSystem Digital Controls

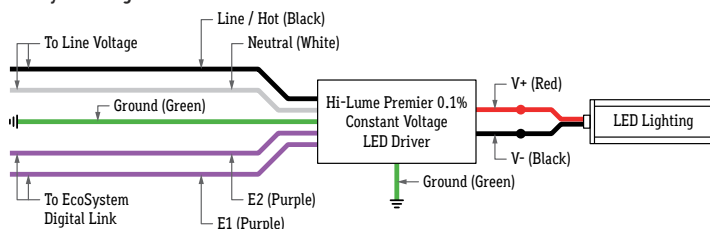

**Note:** Colors shown on diagrams correspond to terminals on driver


### 3-WIRE DIMMING PROTOCOL (Lutron L3D0)

#### Technical Requirements For Control Equipment (3-Wire Dimming)


- Hi-lume Premier 0.1% EcoSystem / 3 Wire constant voltage 24V LED driver with Soft-on, Fade-to-Black. The Hi-lume Premier 0.1% Constant Voltage Driver (L3D0E) is a high-performance LED driver capable of controlling up to 96W of 24V constant voltage loads. This driver provides smooth and continuous dimming down to 0.1% low-end. It is ideal for use with strip lighting in applications such as coves, under or over cabinet lighting and pathway lighting. The driver is UL Listed with an integrated wiring compartment and can be mounted up to 150' away from the load.
- Continuous, flicker-free dimming from 100% to 0.1%
- Soft-on, Fade-to-Black operation for EcoSystem controls: fades smoothly between 0% and 0.1% when turned on and off for an incandescent like experience.
- PWM dimming meets IEEE1789 over the entire dimming range.
- UL Listed for United States and Canada (cULus®).
- NOM certified for Mexico.
- Field Adjustment Knob offers customer low-end light output tuning for better fixture-to-fixture matching.
- Guaranteed dimming performance when used with Lutron controls:
  - HomeWorks QS, Energi Savr Node units with EcoSystem controls, GRAFIK Eye QS with EcoSystem controls, PowPak with EcoSystem dimming modules, PowPak with EcoSystem wireless fixture controls, and Quantum systems, allowing for integration into a planned or existing EcoSystem lighting control solution.
  - Lutron 3-wire controls and interfaces.
- Protected from miswires of input power, up to 277 V~, to EcoSystem control inputs.
- Rated lifetime of 50,000 hours at 40 °C (104 °F) ambient temperature and maximum loading.
- FCC Part 15
  - Class A (277 V~)
  - Class B (120 V~)

### L3D0 3-WIRE WIRING DIAGRAMS

#### 3-Wire Controls

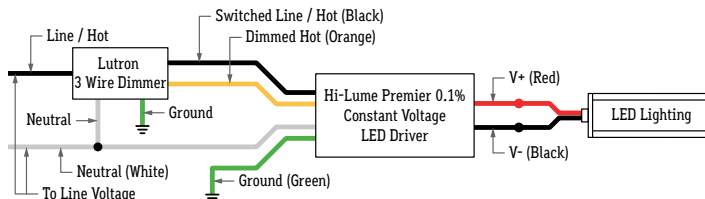

#### EcoSystem Digital Controls

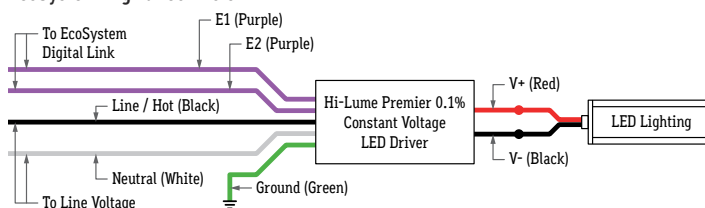

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806


ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.




### WIRING WITH A SINGLE RUN

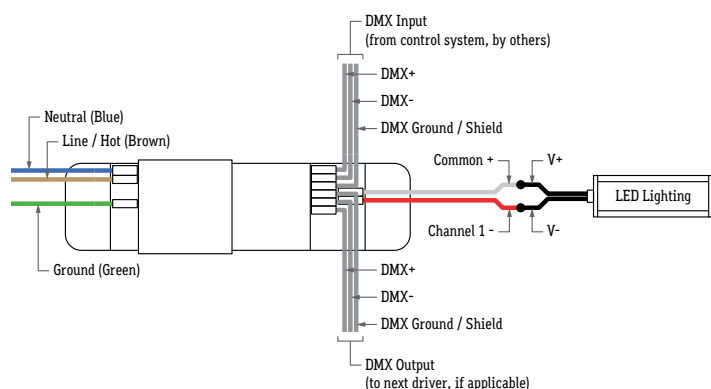


### NOTES

- Wire colors on diagram correspond to colors of driver terminals
- Driver load not to exceed 96W
- A DMX Control System (by others) must be used to operate the drivers
- Ensure DIP Switch 1 is set to ON (Left) to activate 24V operation
- DMX Address must be set for each driver. Default DMX address for each driver is 001.
- The last driver in a daisy chain sequence must be terminated (Refer to previous page for details)
- Up to 28 drivers may be daisy chained together using shielded cable specified for DMX wiring

### WIRING WITH MULTIPLE RUNS

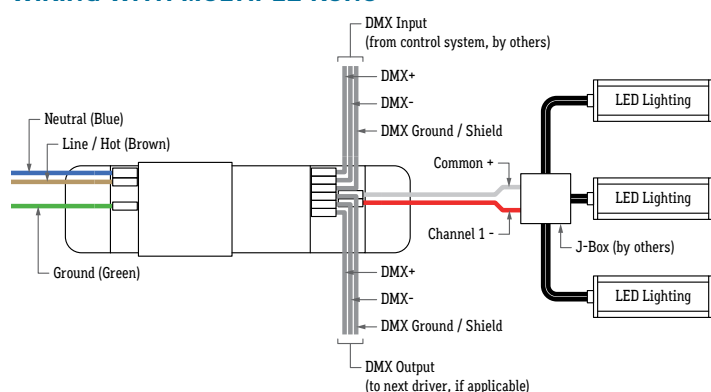


### WIRING WITH MULTIPLE RUNS & DAISY CHAIN

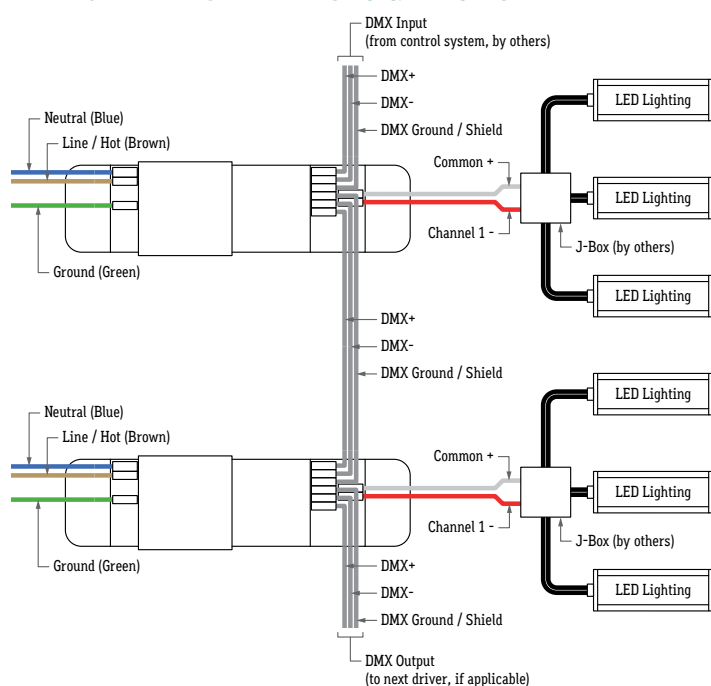





### DIAGRAM OF DRIVER

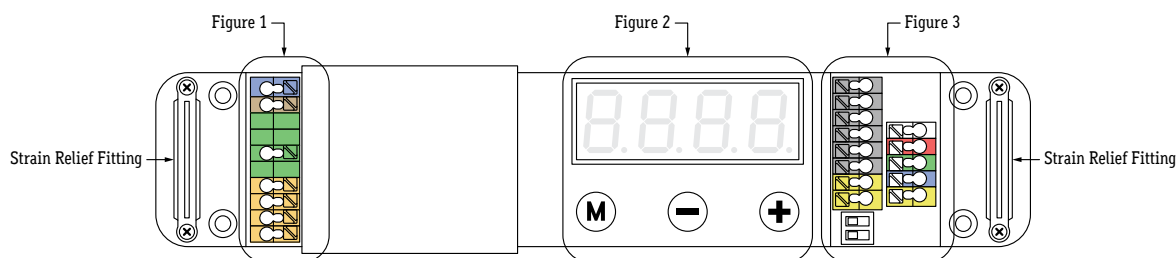


**FIGURE 1 (120V - 277V Input)**



**FIGURE 2 (Digital Interface Control)**

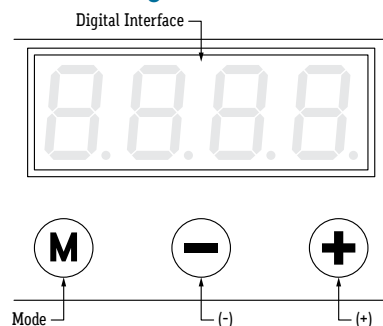


**FIGURE 3 (Output)**

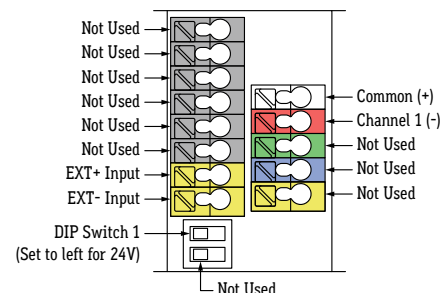


### OPERATION OF DIGITAL INTERFACE CONTROLS


#### 1. Select mode of operation.




#### 2. Set LED groups.

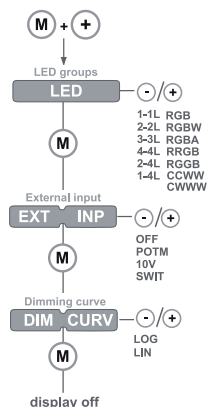

#### 3. Standalone Operation (Color or Show) and Networked Operation (DMX or DALI)

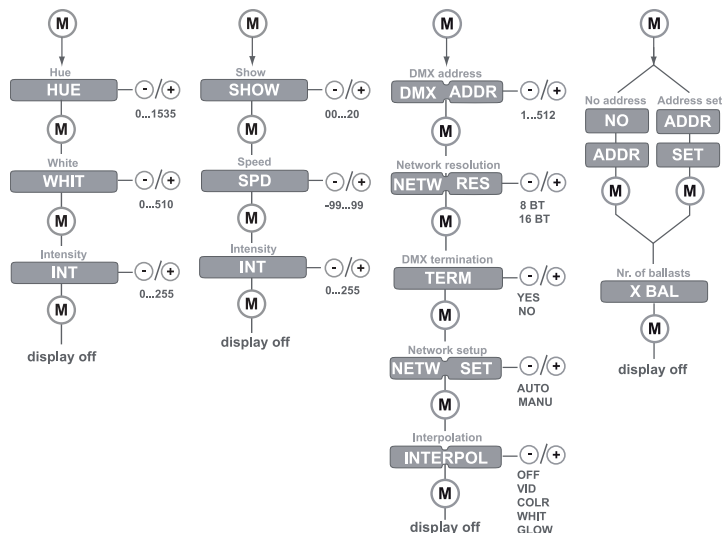

#### 4. Other functions (Lock Configuration, Visual Test, and Reset to Default)

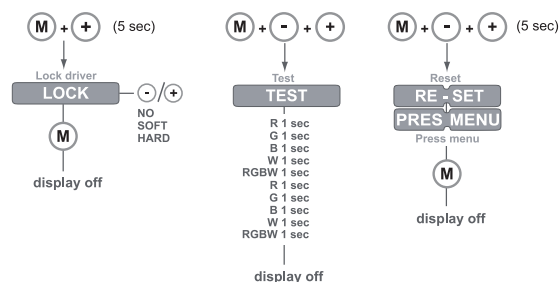




CALIFORNIA  
ACCENT  
LIGHTING  
INC

# STL6550 | INSTALLATION

## Wiring Diagrams (DALI)


### WIRING WITH A SINGLE RUN

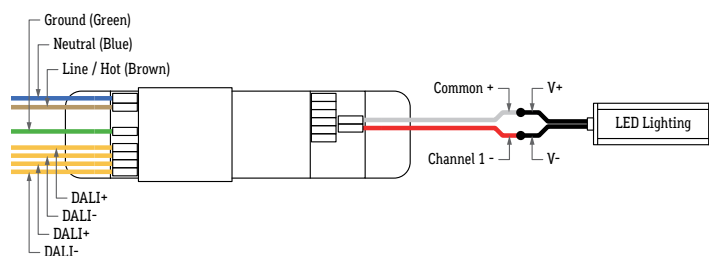

### NOTES

- Wire colors on diagram correspond to colors of driver terminals
- Driver load not to exceed 96W
- A DALI Control System (by others) must be used to operate the drivers
- Ensure DIP Switch 1 is set to ON (Left) to activate 24V operation
- DALI Address must be set for each driver.
- Up to 28 drivers may be daisy chained together using shielded cable specified for DALI wiring

### WIRING WITH DAISY CHAIN

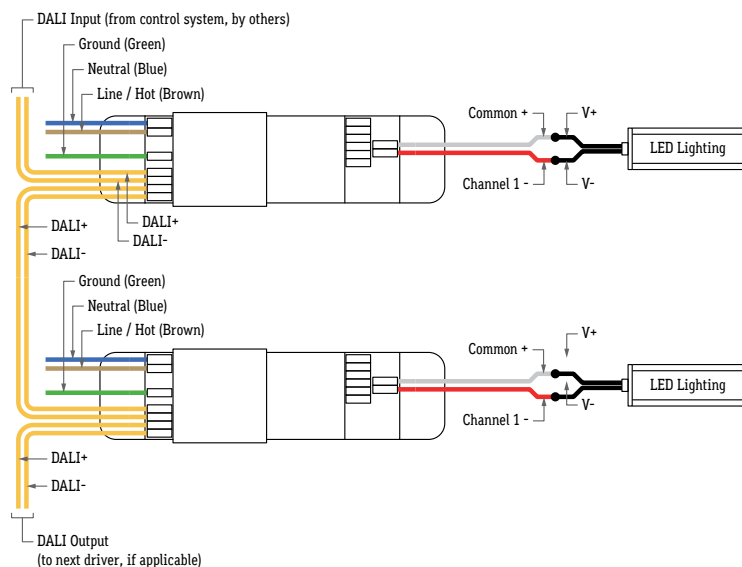

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.






CALIFORNIA  
ACCENT  
LIGHTING  
INC


**STL6550** | INSTALLATION

Design Guidelines


### TYPICAL STEP LAYOUT (3 Steps Shown)

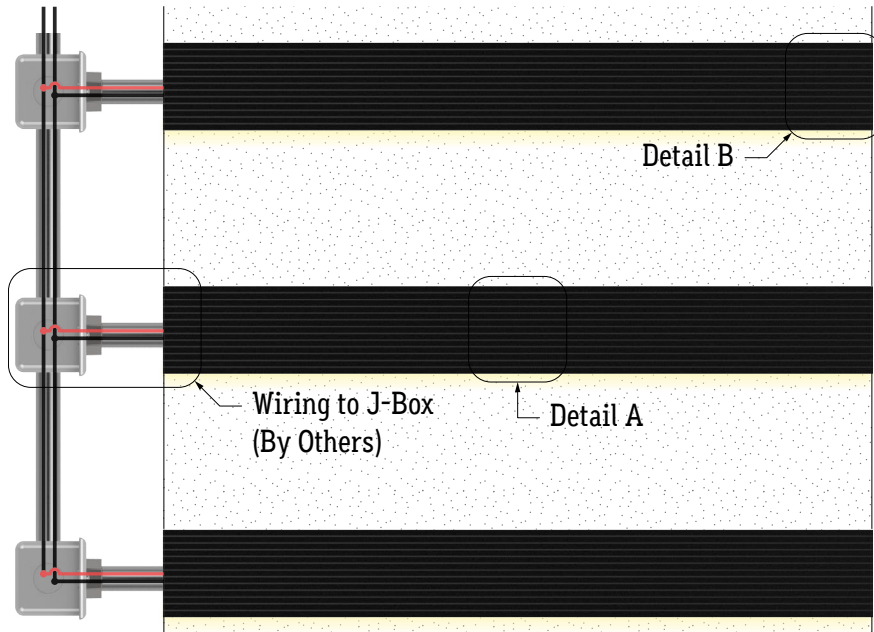

### DETAILS



**Detail A**  
Step Extrusion  
(STL6550)



**Detail B**  
Terminating End with End Cap  
(STL6550-ECR)

**CALIFORNIA ACCENT LIGHTING, INC.**

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | [info@calilighting.com](mailto:info@calilighting.com) | [calilighting.com](http://calilighting.com)

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.



CALIFORNIA  
ACCENT  
LIGHTING  
INC

STL6550 | INSTALLATION

Application Guidelines


## APPLICATION GUIDELINES

- Follow the below diagrams and steps if applicable to your installation.
- LED lightstrip and modules require a team effort to ensure a secure and correct installation.
- Use a wire puller stand to prevent tangles, twists, and snags when installing.
- For Mud-In applications, start lightstrip from power source side and allow up to 2" of excess lightstrip to exit through end cap.

## NOTE


- Extrusions are shipped to exact length of specified measurements.
- Due to cut increment restrictions (2",  $\pm 0.125"$  Tolerance), lightstrip is shipped to the closest measurement ordered. The lightstrip must be centered inside the extrusion.

## LED LIGHTSTRIP

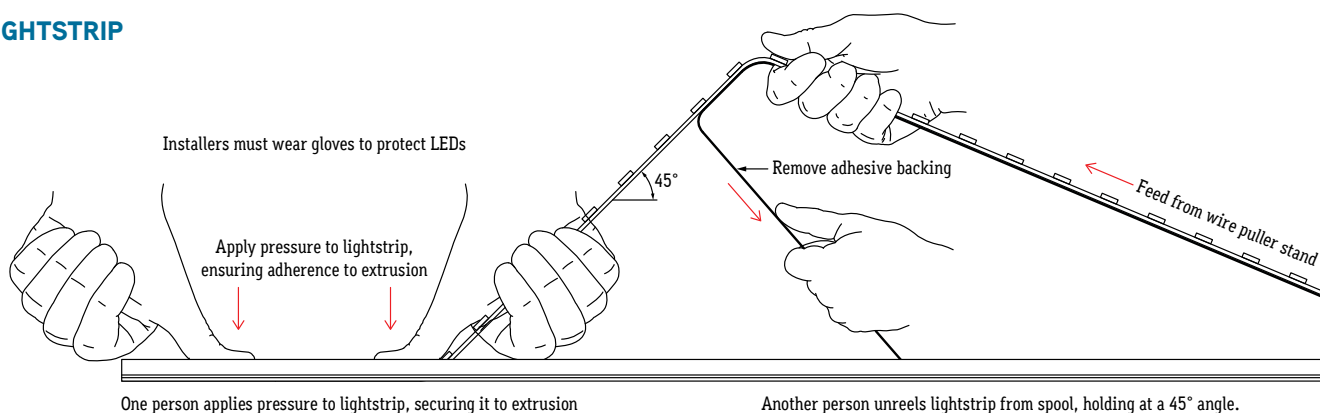


## SOLDERING GUIDE

- Cut lightstrip to desired length. Include both sets of solder pads by cutting to the left or right of designated markings, allowing more space for a stronger solder connection.

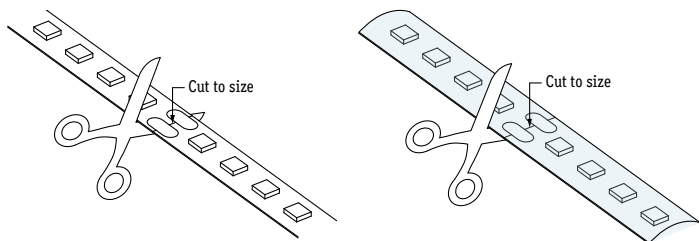


- Prepare wires by stripping 1/8" from the end of each wire, then tin the tips of the wire with solder. Apply heat to stripped portion of wire, then add a small amount of solder until stripped portion of wire is fully covered in solder.

- If applicable, use a mat knife to remove encapsulation from the section of lightstrip with solder pads. If lightstrip is not encapsulated, skip this step.

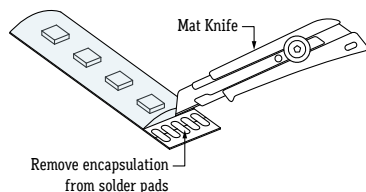


- Solder lead wires to solder pads on the end of lightstrip. Solder the positive wire (Red or Black with ridged jacket) to the pad marked "+24V". Solder the neutral wire (White or Black with smooth jacket) to the pad marked "-".

**Note:** Solder iron to not exceed 720°F. Heat joint with tip of iron. Heat both the solder pad and the wire. Add a small drop of solder on the tip of solder iron to transfer the heat to joint quickly; it should melt and flow smoothly, covering the wire and pad. Remove iron once enough solder has been added to the components. Allow 5 seconds for the joint to cool.

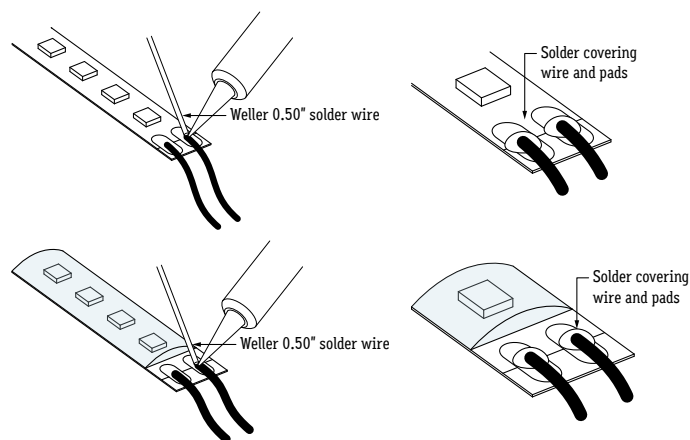

- If applicable, apply silicone over soldered connections. All connections must be completely covered with silicone to create weatherproof seal. Only use outdoor rated silicone. If lightstrip is not encapsulated, skip this step.



**Note:** Appearance of lightstrip may differ from example shown. Refer to wiring diagrams before soldering any wires.

CALIFORNIA ACCENT LIGHTING, INC.


2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.


**stepLITE™**  
Manufactured in the U.S.A.

1. Measure area where fixtures will be installed. Use a chalk line to ensure a straight installation.
2. Lay extrusions along chalk line and drill at least 3 countersink holes per extrusion. Drill additional holes as needed.

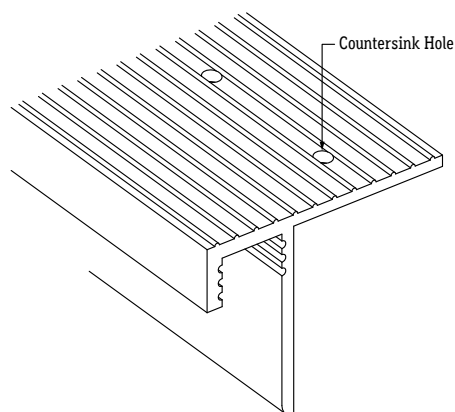


3. If applicable, drill a hole in extrusion channel to route lead wires to conduit or J-Box.  
**Note:** Lead wires exit through end of run otherwise


4. Apply adhesive in a zig zag fashion to the underside of extrusion, then lay extrusion along chalk line and ensure it is secured in place.

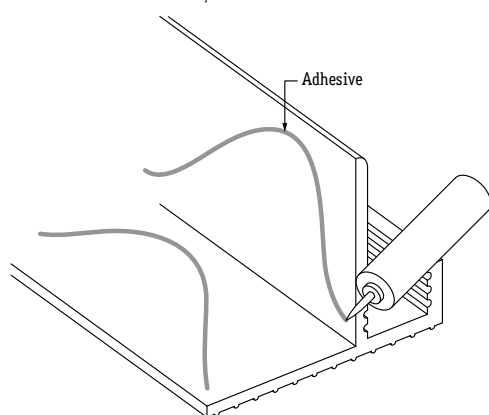

5. Screw extrusions to surface using countersink screws.  
**Note:** Ensure extrusions are aligned. Misalignment will prevent lens from snapping in.

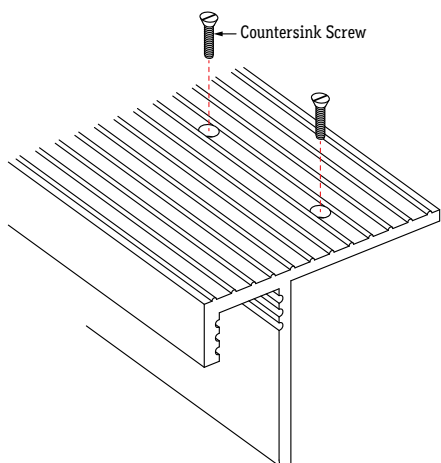


6. After all extrusions have been securely mounted, remove adhesive backing from lightstrip and stick in place along extrusion channel, ensuring lightstrip is secure inside extrusion.  
**Note:** Refer to Application Guidelines on page 10 to ensure correct installation.

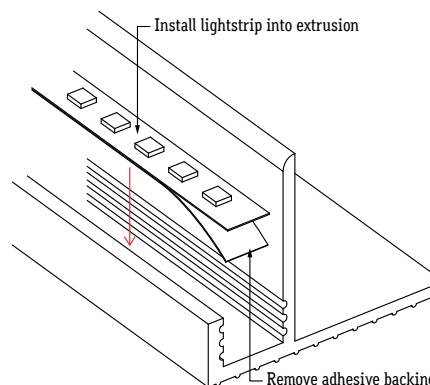

7. If applicable, connect disconnects between fixtures or solder connectors using the steps from Application Guidelines on page 10.

8. Install lens into extrusion, overlapping where two extrusions meet. Plan your cuts so that the lens will always overlap where two extrusions meet. Overlapping lenses helps keep extrusions aligned and prevents light leaks.

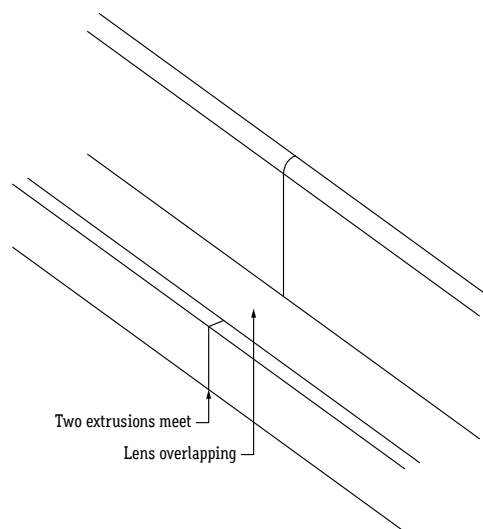

9. Perform continuity test steps on page 15 before connecting fixture to power source.

10. If applicable, install end caps to the end of each run.




CALIFORNIA  
ACCENT  
LIGHTING  
INC

# STL6550 | INSTALLATION


## Mounting Fixture (Wet Location) 1 of 2

1. Measure area where fixtures will be installed. Use a chalk line to ensure a straight installation.
2. Lay extrusions along chalk line and drill at least 3 countersink holes per extrusion. Drill additional holes as needed.

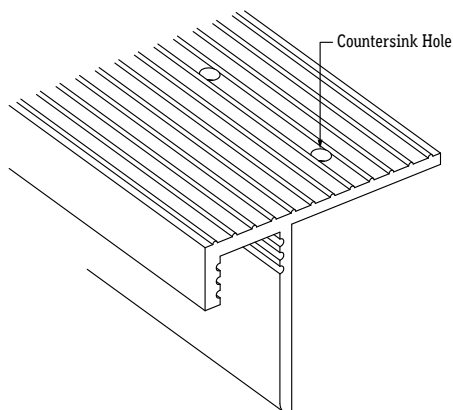


3. If applicable, drill a hole in extrusion channel to route lead wires to conduit or J-Box.  
**Note:** Lead wires exit through end of run otherwise


4. Apply adhesive in a zig zag fashion to the underside of extrusion, then lay extrusion along chalk line and ensure it is secured in place.

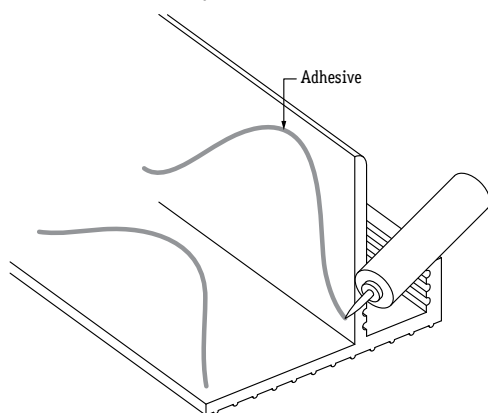


5. Screw extrusions to surface using countersink screws.  
**Note:** Ensure extrusions are aligned. Misalignment will prevent lens from snapping in.

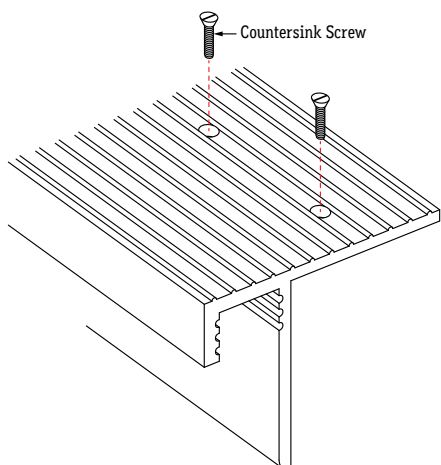


6. After all extrusions have been securely mounted, remove adhesive backing from lightstrip and stick in place along extrusion channel, ensuring lightstrip is secure inside extrusion.  
**Note:** Refer to Application Guidelines on page 10 to ensure correct installation.

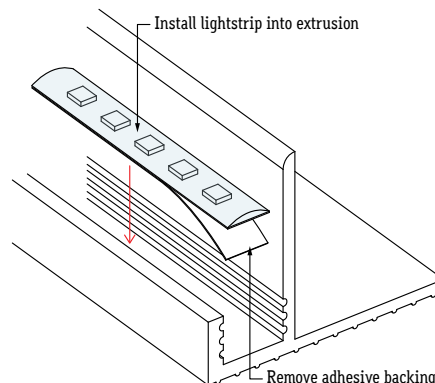


7. If applicable, make connections between fixtures using wet location connectors. Slide shrink tube over wires and connector. Part wires 3/4" for insertion into the connector.

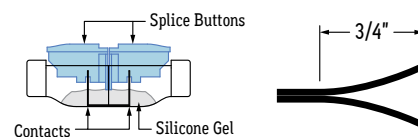


- a. Push wires into connector until they stop at the center point. Repeat process for other side.  
**Note:** Positive wire has ridges on the jacket. Neutral wire has a smooth jacket.

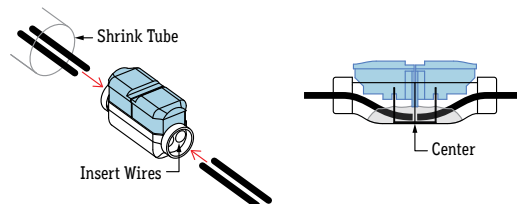

- b. Use pliers to push splice buttons down until they sever the wire and snap into place.

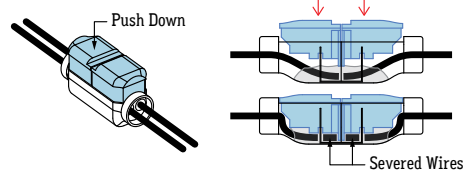

- c. Slide shrink tube over connector and apply heat. The shrink tube will shrink down around the connector. Apply silicone around the ends to create a stronger seal.

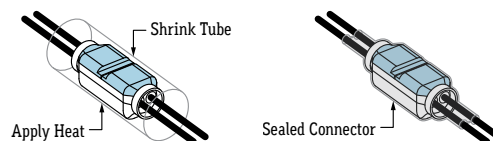

CALIFORNIA ACCENT LIGHTING, INC.


2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.

8. Install lens into extrusion, overlapping where two extrusions meet. Plan your cuts so that the lens will always overlap where two extrusions meet. Overlapping lenses helps keep extrusions aligned and prevents light leaks.

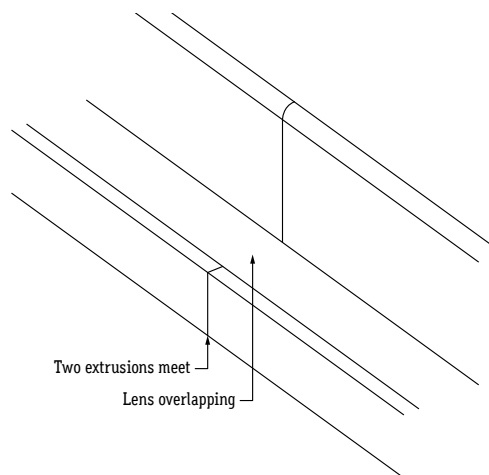

9. Perform continuity test steps on page 15 before connecting fixture to power source.

10. Apply silicone to the ends of each run to seal fixture.  
**Note:** Must use clear, outdoor rated silicone (by others).

11. If applicable, install end caps to the end of each run.

## EXAMPLE: 90° MITER


Miter cuts are only to be performed on unassembled dry location products. Do not attempt to modify wet location products.

1. Measure area where mitered fixture will be installed. Cut extrusion and lens to size +1".

Example: 7'8" extrusion to meet 1'5" extrusion. Cut extrusions to 7'9" and 1'6"


**Note:** Plan your cuts so that lens will always overlap where two extrusions meet

Overlapping lenses helps keep extrusions in line and prevents light leaks.

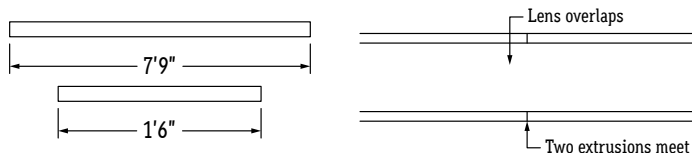


2. Measure angle where fixture will be mitered. Use an angle finder to determine exact angle.


Example: 90° Angle



3. Divide measured angle by 2 ( $90^\circ \div 2 = 45^\circ$ ). Set miter saw to 45° and cut the end of each extrusion and lens where they will intersect. Verify the miter closes properly and fits in area, then trim excess extrusion on the end without the miter to exact size.

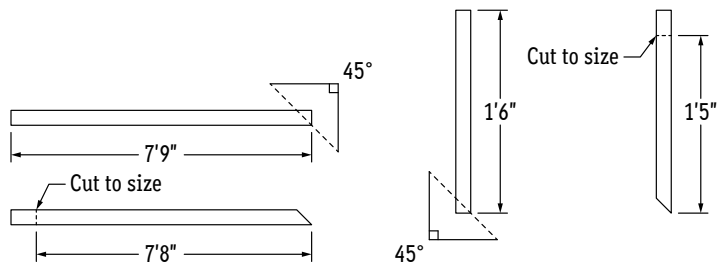

4. Use a small segment of wire to solder lightstrips between mitered extrusions. Do not bend lightstrip to turn corner. Refer to application guidelines for soldering steps.

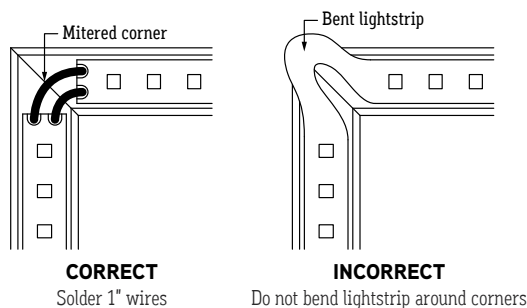


## EXAMPLE: 135° MITER

1. Measure area where mitered fixture will be installed. Cut extrusion and lens to size +1".

Example: 7'8" extrusion to meet 1'5" extrusion. Cut extrusions to 7'9" and 1'6"


**Note:** Plan your cuts so that lens will always overlap where two extrusions meet

Overlapping lenses helps keep extrusions in line and prevents light leaks.

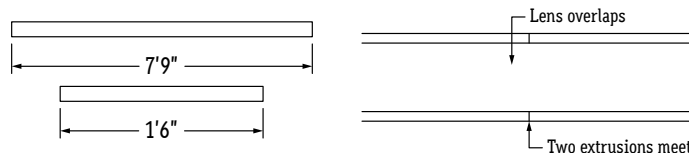


2. Measure angle where fixture will be mitered. Use an angle finder to determine exact angle.


Example: 135° Angle



3. Divide measured angle by 2 ( $135^\circ \div 2 = 67.5^\circ$ ). Set miter saw to 67.5° and cut the end of each extrusion and lens where they will intersect. Verify the miter closes properly and fits in area, then trim excess extrusion on the end without the miter to exact size.

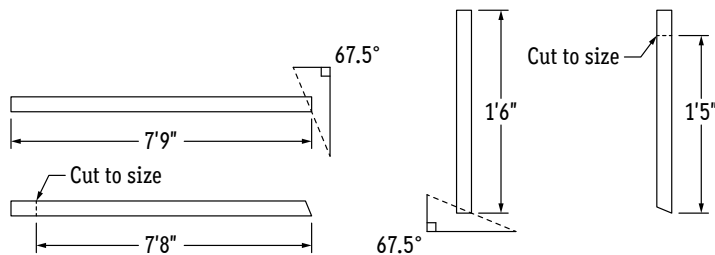


4. Use a small segment of wire to solder lightstrips between mitered extrusions. Do not bend lightstrip to turn corner. Refer to application guidelines for soldering steps.

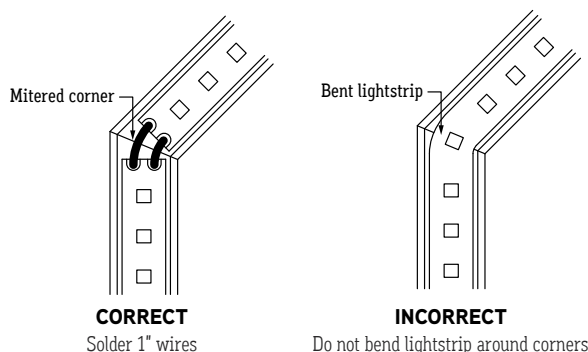


### TROUBLESHOOTING TIPS

- Do not reset the breaker multiple times
- If the unit is overloaded, the breaker will trip, shutting off the transformer and lights
- If the breaker reset button has been held down by hand or any type of pressure, such as duct tape, or if the breaker has been reset multiple times without troubleshooting, the unit will:
  - Burn the transformer bobbin
  - Burn the thermal or magnetic breaker
  - Burn the primary or secondary wires due to high amperage caused by overload
  - Short circuit in line which will not allow the breaker to reset
  - Damage the lighting


1. Turn off power before beginning. Check for any twisting or damage to the circuit in the LED lightstrip. If there is excessive damage and the circuit is broken, the lightstrip must be replaced.

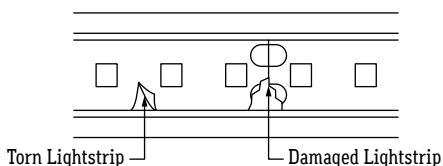

2. Check for metal particles or other foreign objects causing the short.



3. Check to make sure cuts in the lightstrip are clean and not frayed, causing positive and negative copper pads to touch.

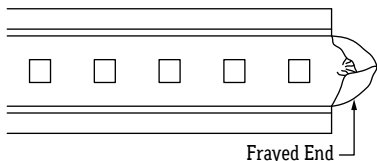


### CONTINUITY TEST

A continuity test is performed to determine if electricity can pass through two points on an electrical circuit. This helps identify shorts or malfunctions in the line or fixture. Use a multimeter or continuity tester to perform the steps below.

- Always perform a continuity test before connecting lighting to power source.
- Malfunctions are not always as obvious as the lights not turning on.
- A short or malfunction in the line or fixture will cause damage over time, ultimately damaging the lighting and voiding warranty.


1. Turn power off before beginning. Verify power is turned off by using a non-contact circuit tester. Touch the probe of the tester to positive wire of the power source. The tester will light up if an electrical current is detected.

2. Setup your tester. First insert the black probe lead into the COM jack, then insert the red probe lead into the VΩ jack.




3. Verify that your tester is functional by touching probes together. The tester should light up, beep, or read 0Ω (ohms) of resistance.


4. Touch the red probe to the positive (+) wire and the black probe to the negative (-) wire. If a conductive path is formed between the positive and negative wires, the multimeter will beep, flash, or read 0Ω (ohms). Troubleshoot to identify the malfunction in the line. If there is no conductive path, the multimeter will not show any feedback.

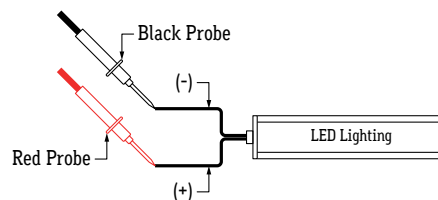

5. Touch the red probe to the fixture extrusion and the black probe to the positive (+) wire. If a conductive path is formed between the extrusion and the positive wire, the multimeter will beep, flash, or read 0Ω (ohms). Troubleshoot to identify the malfunction in the line. If there is no conductive path, the multimeter will not show any feedback.

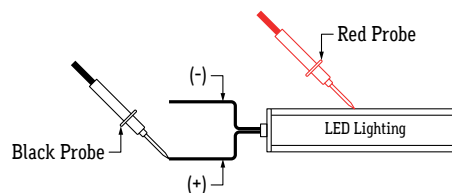

6. Touch the red probe to the fixture extrusion and the black probe to the negative (-) wire. If a conductive path is formed between the extrusion and the negative wire, the multimeter will beep, flash, or read 0Ω (ohms). Troubleshoot to identify the malfunction in the line. If there is no conductive path, the multimeter will not show any feedback.

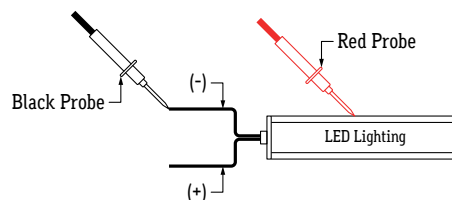

7. Set voltmeter to DC voltage and test power source. Confirm the correct voltage before connecting lighting to power source. If voltage reading is more than 1 volt higher than the marked output voltage, there is a problem with the power source or driver.

8. Connect power connector to power source. If LEDs do not turn on, flip polarity (+ -) or power source connection to power connector.





CALIFORNIA  
ACCENT  
LIGHTING  
INC

**STL6550** | INSTALLATION

Magnetic Transformer Remote Driver (TRA)


**MAXIMUM RUN BASED ON 80% LOAD OF MAGNETIC TRANSFORMER (TRA) MAXIMUM WATTAGE**

TRANSFORMER WATTAGE	80% LOAD	1.5W MAX RUN	2W MAX RUN	2.5W MAX RUN	3.6W MAX RUN	4W MAX RUN	4.5W MAX RUN	5W MAX RUN	5.5W MAX RUN	6W MAX RUN	6.5W MAX RUN
5	4W	2.6'	2'	1.6'	1.1'	1'	0.8'	0.8'	0.7'	0.6'	0.6'
10	8W	5.3'	4'	3.2'	2.2'	2'	1.7'	1.6'	1.4'	1.3'	1.2'
20	16W	10.6'	8'	6.4'	4.4'	4'	3.5'	3.2'	2.9'	2.6'	2.4'
35	28W	18.6'	14'	11.2'	7.7'	7'	6.2'	5.6'	5.1'	4.6'	4.3'
40	32W	21.3'	16'	12.8'	8.8'	8'	7.1'	6.4'	5.8'	5.3'	4.9'
50	40W	26.6'	20'	16'	11.1'	10'	8.8'	8'	7.2'	6.6'	6.1'
60	48W	32'	24'	19.2'	13.3'	12'	10.6'	9.6'	8.7'	8'	7.3'
75	60W	40'	30'	24'	16.6'	15'	13.3'	12'	10.9'	10'	9.2'
90	72W	48'	36'	28.8'	20'	18'	16'	14.4'	13.1'	12'	11.1'
150	120W	80'	60'	48'	33.3'	30'	26.6'	24'	21.8'	20'	18.4'
200	160W	106.6'	80'	64'	44.4'	40'	35.5'	32'	29.1'	26.6'	24.6'
250	200W	133.3'	100'	80'	55.5'	50'	44.4'	40'	36.3'	33.3'	30.7'
300	240W	160'	120'	96'	66.6'	60'	53.3'	48'	43.6'	40'	36.9'

**PREVENTING VOLTAGE DROP**

The maximum wire length to prevent voltage drop refers to the wire that is used between the transformer and 1st LED of the lighting fixture. If the gauge wire is too small, the fixture will not receive correct voltage.

**Example:** LED luminaire requires 24VDC to operate effectively. If the wire gauge is too small to carry the 24VDC current from the transformer, the voltage can shrink to 16VDC, which is insufficient to power the lighting.



**WATTS (VA) PER CIRCUIT (Maximum wire length to prevent voltage drop)**


WIRE SIZE	VOLTAGE	5 VA	10 VA	20 VA	35 VA	40 VA	50 VA	60 VA	75 VA	90 VA	150 VA	200 VA	250 VA	300 VA	500 VA	600 VA
14GA	12V	51'	49'	44'	39'	37'	35'	32'	30'	25'	18'	14'	9'	7'		
14GA	24V	103'	98'	89'	80'	75'	70'	66'	61'	51'	37'	28'	18'	14'		
12GA	12V	81'	76'	70'	63'	59'	55'	52'	48'	40'	29'	22'	14'	11'		
12GA	24V	162'	155'	140'	125'	118'	111'	103'	96'	81'	59'	44'	29'	22'		
10GA	12V	129'	123'	112'	100'	94'	88'	82'	76'	65'	47'	35'	24'	18'	7'	4'
10GA	24V	258'	247'	223'	200'	188'	176'	165'	153'	129'	94'	71'	48'	36'	15'	9'
8GA	12V	205'	196'	177'	158'	149'	140'	130'	121'	102'	74'	55'	37'	27'	12'	7'
8GA	24V	411'	392'	355'	318'	299'	280'	262'	243'	205'	149'	112'	75'	55'	24'	14'

**TRANSFORMER CARE**

- Do not submerge transformers in any liquid
- Do not leave any exposed wires
- Do not cover transformer without proper ventilation
- Do not install damaged transformer
- Do not exceed maximum load

**DIMMER TRIM VALUES**

- Set dimmer trim value as needed to prevent flickering and irregular dimming
- **Note:** Review dimmer specs for trim value adjustment

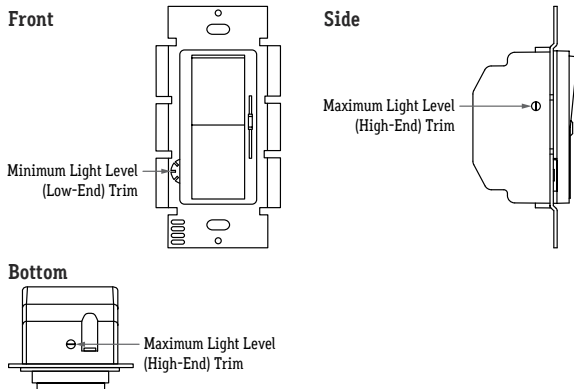

**CALIFORNIA ACCENT LIGHTING, INC.**

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.



CALIFORNIA  
ACCENT  
LIGHTING  
INC

STL6550 | INSTALLATION

Electronic Transformer Remote Driver (TRA-E)


#### MAXIMUM RUN BASED ON 80% LOAD OF ELECTRONIC TRANSFORMER (TRA-E) MAXIMUM WATTAGE

TRANSFORMER WATTAGE	80% LOAD	1.5W MAX RUN	2W MAX RUN	2.5W MAX RUN	3.6W MAX RUN	4W MAX RUN	4.5W MAX RUN	5W MAX RUN	5.5W MAX RUN	6W MAX RUN	6.5W MAX RUN
16	12.8W	8.5'	6.4'	5.1'	3.5'	3.2'	2.8'	2.5'	2.3'	2.1'	1.9'
25	20W	13.3'	10'	8'	5.5'	5'	4.4'	4'	3.6'	3.3'	3.1'
40	32W	21.3'	16'	12.8'	8.8'	8'	7.1'	6.4'	5.8'	5.3'	4.9'
60	48W	32'	24'	19.2'	13.3'	12'	10.6'	9.6'	8.7'	8'	7.3'
80	64W	42.6'	32'	25.6'	17.7'	16'	14.2'	12.8'	11.6'	10.6'	9.8'
90	72W	48'	36'	28.8'	20'	18'	16'	14.4'	13.1'	12'	11.1'
96	76.8W	51.2'	38.4'	30.7'	21.3'	19.2'	17.1'	15.36'	13.9'	12.8'	11.8'
120	96W	64'	48'	38.4'	26.6'	24'	21.3'	19.2'	17.4'	16'	14.7'
150	120W	80'	60'	48'	33.3'	30'	26.6'	24'	21.8'	20'	18.4'
185	148W	98.6'	74'	59.2'	41.1'	37'	32.8'	29.6'	26.9'	24.6'	22.7'
240	192W	128'	96'	76.8'	53.3'	48'	42.6'	38.4'	34.9'	32'	29.5'
320	256W	170.6'	128'	102.4'	85.3'	64'	56.8'	51.2'	46.5'	42.6'	39.3'

#### PREVENTING VOLTAGE DROP

The maximum wire length to prevent voltage drop refers to the wire that is used between the transformer and 1st LED of the lighting fixture. If the gauge wire is too small, the fixture will not receive correct voltage.

**Example:** LED luminaire requires 24VDC to operate effectively. If the wire gauge is too small to carry the 24VDC current from the transformer, the voltage can shrink to 16VDC, which is insufficient to power the lighting.



#### WATTS (VA) PER CIRCUIT (Maximum wire length to prevent voltage drop)

WIRE SIZE	VOLTAGE	16 VA	25 VA	40 VA	60 VA	80 VA	90 VA	96 VA	120 VA	150 VA	185 VA	240 VA	320 VA
14GA	12V	46'	42'	37'	32'	28'	25'	23'	21'	18'	16'	11'	4'
14GA	24V	93'	84'	75'	66'	56'	51'	47'	42'	37'	33'	23'	9'
12GA	12V	74'	66'	59'	52'	44'	40'	37'	33'	29'	26'	18'	7'
12GA	24V	147'	132'	118'	103'	89'	81'	74'	67'	59'	52'	37'	15'
10GA	12V	117'	106'	94'	82'	71'	65'	59'	53'	47'	41'	30'	12'
10GA	24V	235'	211'	188'	165'	141'	129'	118'	106'	94'	83'	59'	24'
8GA	12V	186'	168'	149'	130'	112'	102'	93'	84'	74'	65'	46'	18'
8GA	24V	374'	336'	299'	262'	224'	205'	187'	168'	149'	131'	93'	37'

#### TRANSFORMER CARE


- Do not submerge transformers in any liquid
- Do not leave any exposed wires
- Do not cover transformer without proper ventilation
- Do not install damaged transformer
- Do not exceed maximum load

#### MOUNTING INSIDE AN ENCLOSURE

- Only mount drivers inside enclosures rated for your application
- Always ground drivers to enclosure
- Do not mount drivers without an enclosure
- Use enclosure knockouts and water-tight cordgrips when applicable

#### DIMMER TRIM VALUES

- Set dimmer trim value as needed to prevent flickering and irregular dimming
- **Note:** Review dimmer specs for trim value adjustment

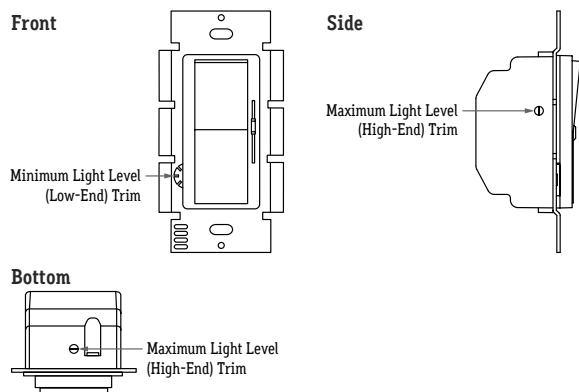


CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806



ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

**stepLITE™**  
Manufactured in the U.S.A.

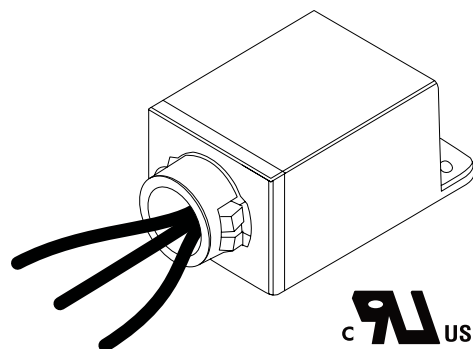

## CASE DIMENSIONS

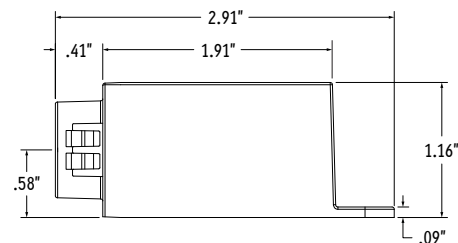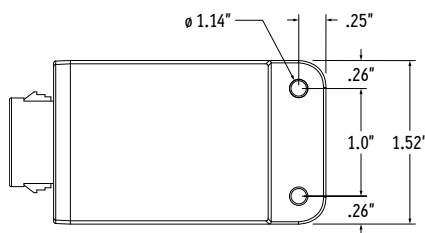

## SURGE PROTECTOR SPECIFICATIONS

MODEL	INPUT VOLTAGE	SURGE PROTECTION LEVEL	MOUNTING	ENCLOSURE MATERIAL	INPUT LEADS	INPUT FREQUENCY
ALS-SP	120V - 277V	10kV, 10kA, ANSI C62.41 Category C	SnapLOCK / Footed	Polycarbonate	6", 18AWG stranded, 105°C stripped, 3/8" tinned	60Hz


## PRODUCT FEATURES

The Surge Series are 3-leaded devices that protect Line-Ground, Line-Neutral, and Neutral-Ground in accordance with IEEE / ANSI C62.41.2 guidelines. Protects against surges according to IEEE C62.41.2 C High (10kA and 10kV). Surge current rating = 10,000 Amps using industry standard 8/20  $\mu$ Sec wave. Surge Location Rated Category C3. UL Recognized Component in the United States and Canada (UL1449). Type 4 Surge Protection Device. High temperature, flame retardant plastic enclosure, 85°C maximum surface temperature rating. Thermally Protected Transient Over-voltage Circuit.

## PRODUCT SPECIFICATIONS

The Surge series of products are designed to be used in conjunction with LED Drivers and fixtures to provide an additional level of protection against powerline disturbances in industrial, commercial and residential applications where surge protection to IEEE C62.41.2 is required.

## 0-10V WIRING DIAGRAM (10V Dimming)

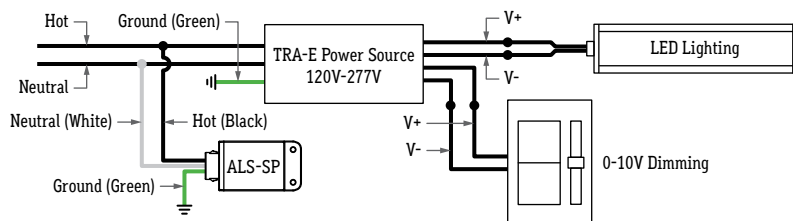

**Note:** Wire colors vary based on model. See individual TRA-E submittal for more information, or refer to wire callouts on transformer labeling. Always confirm wire colors before connecting to power source.

## FORWARD PHASE WIRING DIAGRAM (Forward Phase Dimming)

