





CALIFORNIA
ACCENT
LIGHTING
INC

ALS210T-LP-MC-1 | INSTALLATION


Perspective View

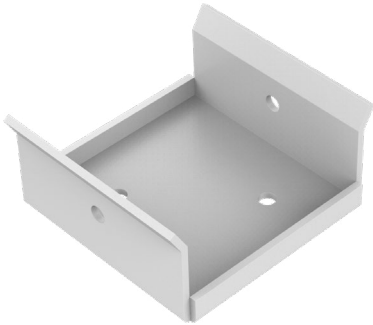


Assembled End Views



Clear Lens




Semi-Frosted Lens
Frosted Lens
Asymmetric Lens




Optic Lens

DRY LOCATION


1. Measure area where luminaire will be installed. Use a chalk line to ensure a straight installation.
2. Mark location where mounting clips will be installed along chalk line.
3. Use 3 mounting clips every 8' or 2 if fixture is 4' or shorter.



4. Use 1 mounting clips every 4' + 1.
Example: 8' + 8' + 4' = 2 MC + 2 MC + 1MC + 1MC = 6 MC total.
Use a mounting clip at the joint between two fixtures.

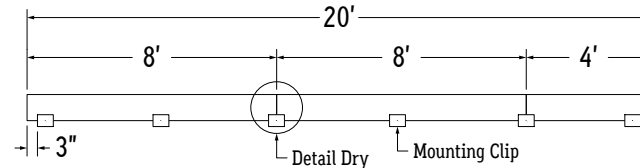


5. Lay mounting clips and pre-drill using proper drill bit for surface and screw size.
Recommendation: 8/32 x 1" screw.
Note: Allow 0.25" clearance for lateral expansion of assembled mounting clips.
Only install mounting clips on flat, even surfaces.

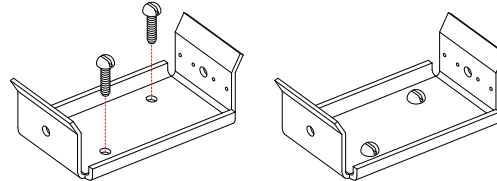


WET LOCATION

1. Measure area where luminaire will be installed. Use a chalk line to ensure a straight installation.
2. Mark location where mounting clips will be installed along chalk line.
3. Use 3 mounting clips every 8' or 2 if fixture is 4' or shorter.



4. Use 2 mounting clips per fixture.
Example: 8' + 8' + 4' = 2 MC + 2 MC + 1MC = 6 MC total.
Push fixtures together at each connection until end caps touch.

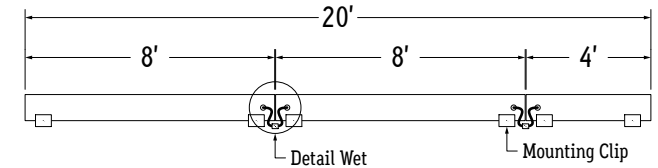

6. Screw mounting clips to surface, then snap fixture into mounting clips.