

**ALS600T
PRODUCT LAUNCH
AUGUST 2020**



Lighting for the Professional Designer

THE ALL NEW ALS600T

CALI proudly introduces the ALS600T to the *alumLEDs* product line. The ALS600T is a new versatile system strategically designed for indoor and outdoor custom wall wash applications.

ALS600T has a unique 0-10V dimming capability with a 100-0% dim to dark feature. Performing at very high output, the ALS600T has an impressive Color Rendering Index greater than 90.



ALS600T presents innovative features:

- 0°-60° Degree and Asymmetric Optics
- Fixed or Adjustable
- Tempered Glass Lens
- Louvers
- Increased Range of Mounting Options




INCREASED QUALITY OF ILLUMINATION

ALS600T offers a Louver accessory that helps reduce glare in a variety of applications. The Louver also shields the LEDs in harsh environments while producing a more precise light distribution.

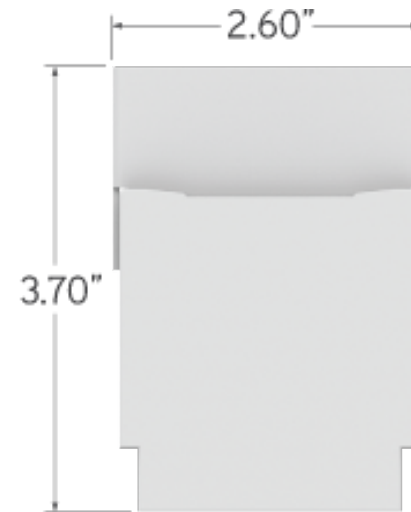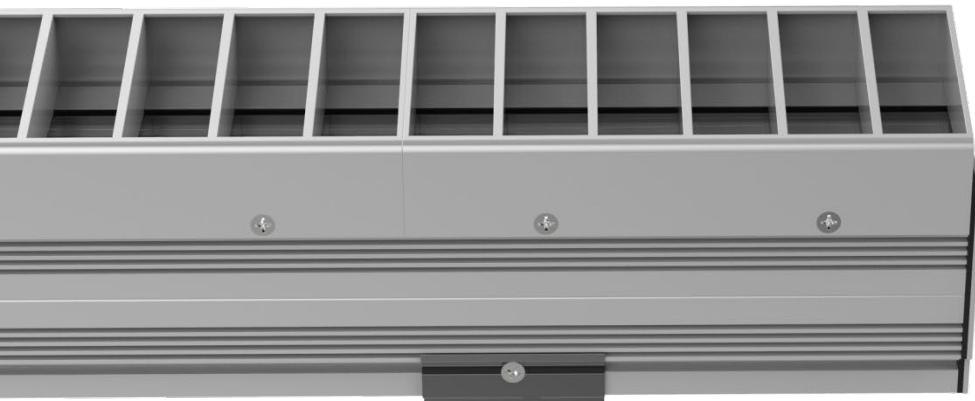


OPTICS FOR THE BEST ILLUMINATION


Now you can illuminate in the most challenging architectural spaces with a wider selection of beam angles that are configurable to fit you lighting design.




120° x 120° Beam
Clear Lens (GCL)




45° x 60° Beam
Asymmetric Lens
(ASM)




10° x 10° Beam
Optic Lens
(10D)




15° x 15° Beam
Optic Lens
(15D)




25° x 25° Beam
Optic Lens
(25D)




30° x 30° Beam
Optic Lens
(30D)




45° x 45° Beam
Optic Lens
(45D)



60° x 60° Beam
Optic Lens
(60D)




15° x 60° Beam
Optic Lens
(15Dx60D)




30° x 60° Beam
Optic Lens
(30Dx60D)

MORE MOUNTING OPTIONS. LESS OBSTACLES.

ALS600T offers accessories to solve all installation solutions. By expanding from fixed mounting options to more adjustable mounting choices, illuminating in any harsh architectural space just became a lot easier.

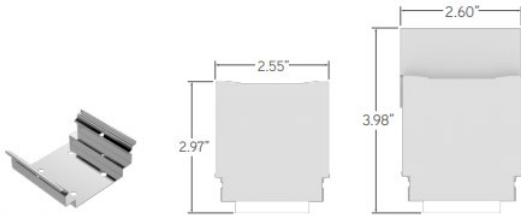


Mounting Clip
(ALS600T-MC)

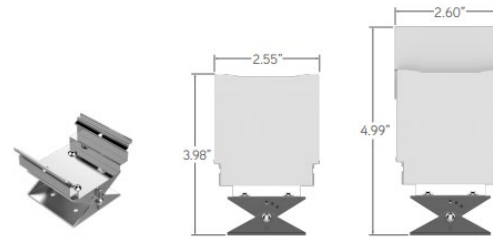

Mounting Clip (Adjustable with Locking Mechanism)
(ALS600T-MC-3)




Bottom Mounting Arm (Adjustable)
(ALS600T-AA-BM-X)
(X = Specify Length. 4" Min, 18" Max)

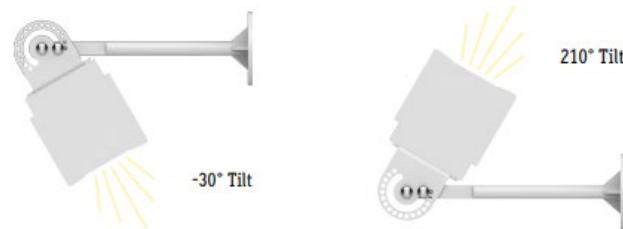

Tilt either direction in 15° increments.
Minimum Tilt: -30° downward, towards mounting surface
Maximum Tilt: 210° upward, towards mounting surface



Side Mounting Arm (Adjustable)
(ALS600T-AA-SM-X)
(X = Specify Length. 4" Min, 18" Max)

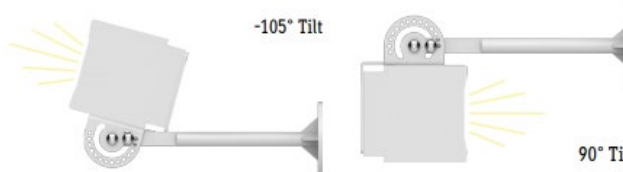

Tilt either direction in 15° increments.
Minimum Tilt: -105° outward, away from mounting surface
Maximum Tilt: 90° inward, toward mounting surface

Full 0-10V Dimming Capability – 100% to 0% Dimming Driver

ALS600T is available in 120 or 277 volts with a dimmable integral driver. The driver has 0-10V dimming capabilities. Consult factory for other dimming protocols available.

- A. 100% to 0% Dimming Driver
 - i. Turns off at 10% dimming, lights up at 10% without the full brightness flash

CALI

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane Anaheim, CA 92806

ph. 800.921.CALI | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

