



## Perspective View




## Assembled End View

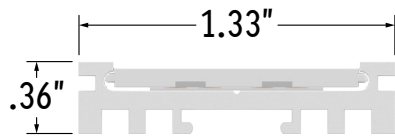


1. After all extrusions have been securely mounted, remove adhesive backing from lightstrip and stick in place along extrusion channel, ensuring lightstrip is secure inside extrusion.

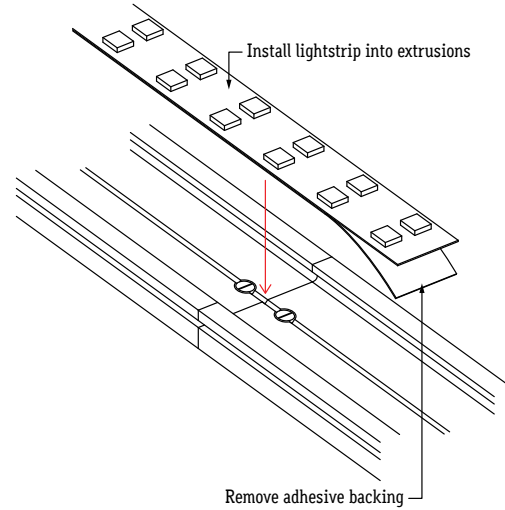

2. Ensure lightstrip is secured in place and is free of twists, tangles, creases, or bumps.

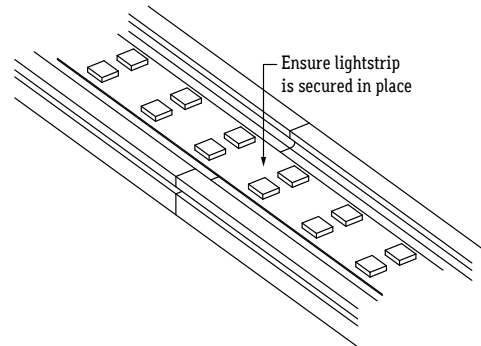

3. If applicable, install channel clips to hold lightstrip in place. Use 3 clips per foot. **Note:** Channel clips are required for downward and outward facing applications.

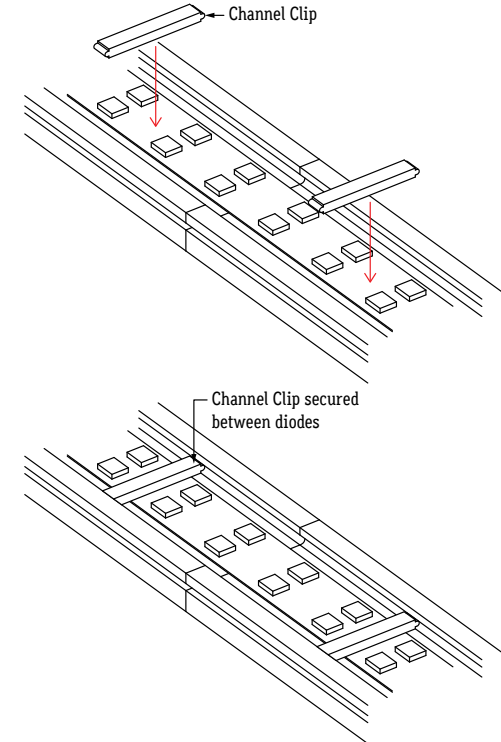

4. If applicable, connect disconnects between fixtures or solder connectors.

5. Perform continuity test before connecting fixture to power source.