


Perspective View




Assembled End View

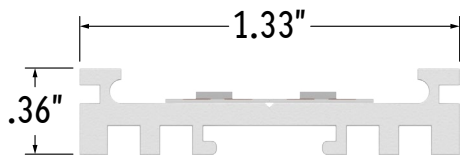


1. Measure area where luminaire will be installed. Use a laser line to create a reference line along installation area, ensuring consistent alignment of mounting channels.

2. Lay extrusions along chalk line and drill at least 3 countersink holes per extrusion. Drill additional holes as needed.

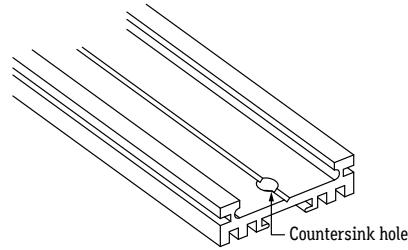


3. Screw extrusions to surface using countersink screws.


Note: Ensure extrusions are aligned.

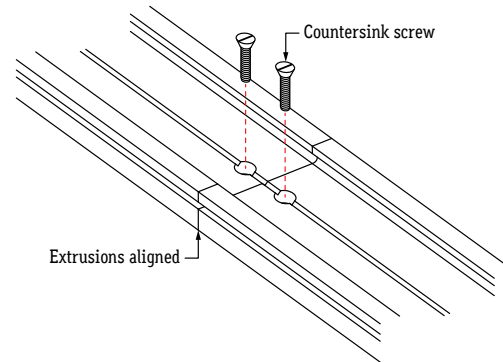

4. After all extrusions have been securely mounted, remove adhesive backing from lightstrip and adhere in place along extrusion channel, ensuring lightstrip is secure inside extrusion.

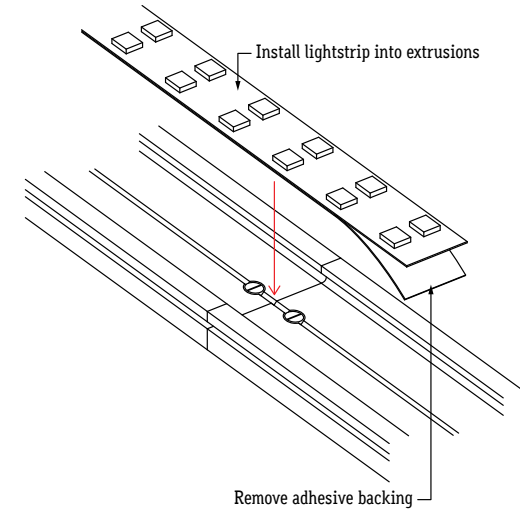

5. Ensure lightstrip is secured in place and is free of twists, tangles, creases, or bumps.

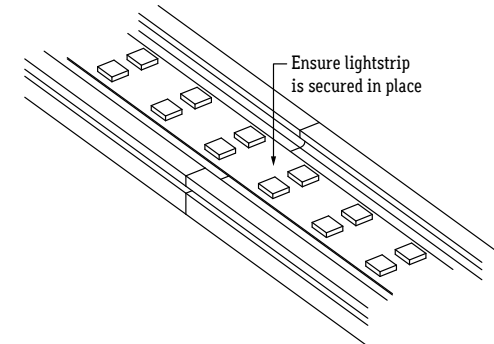

6. If applicable, connect disconnects between fixtures or solder connectors.

7. Perform continuity test before connecting fixture to power source.