


Wet Continuous Connector (20/2 Gauge Wire)  
(LLED9100-CC-WET-X)  
X = Specify Length, 3" Standard


## CONNECTOR ASSEMBLY

1. Make splice connections between connector and power leads.

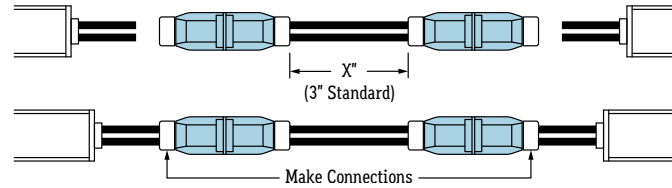


2. Perform continuity test before connecting fixture to power source.

Link: <http://www.calilighting.com/assets/pdf/lipLEDs/LLED9100-Continuity-Test.pdf>

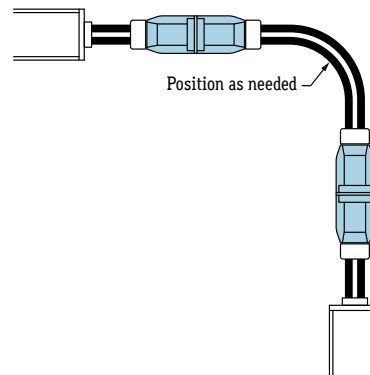


## SPLICE CONNECTION


1. Make connections between fixtures using wet location connectors. Slide shrink tube over wires and connector. Part wires 3/4" for insertion into the connector.

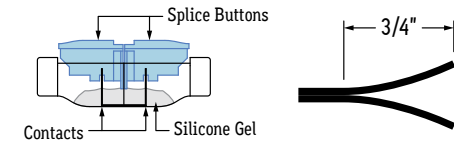


2. Push wires into connector until they stop at the center point. Repeat process for other side.  
**Note:** Positive wire has ridges on the jacket. Neutral wire has a smooth jacket.

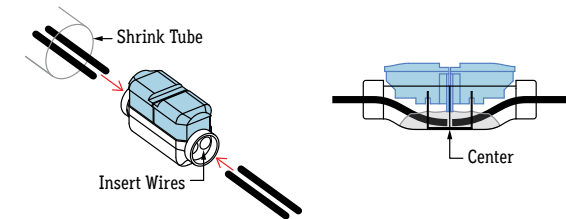

3. Use pliers to push splice buttons down until they sever the wire and snap into place.

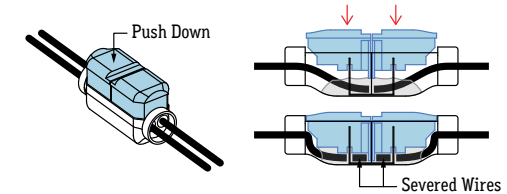

4. Slide shrink tube over connector and apply heat. The shrink tube will shrink down around the connector. Apply silicone around the ends to create a stronger seal.

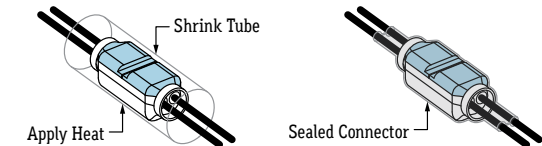

5. Perform continuity test before connecting fixture to power source.

### CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806  
ph. 800.921.CALI (2254) | fx. 714.535.7902 | [info@calilighting.com](mailto:info@calilighting.com) | [calilighting.com](http://calilighting.com)  
© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

This document is issued in strict confidence on condition that it is not used as a basis for manufacture or sale and is not copied, reprinted, or disclosed to a third party either wholly or in part without the prior written consent of California Accent Lighting, Inc.

lipLEDs™

