




CALIFORNIA
ACCENT
LIGHTING
INC

± 0.15" Tolerance

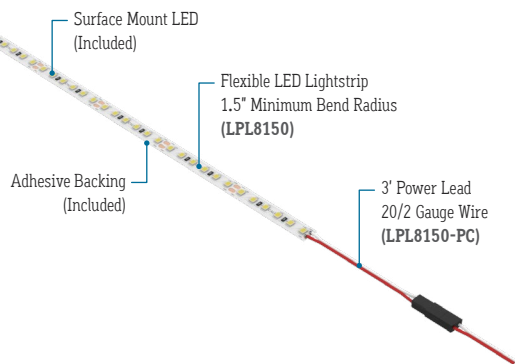

FEATURES

APPLICATIONS	Accent, Decorative, Surface, Recessed, Pendant Lighting
LAMP TYPE	LEDs
CRI	> 85
VIEWING ANGLE	120°
MOUNTING	Mounting Channel or Mounting Clips (Sold Separately)
WEIGHT	0.016 lbs per foot
CONSTRUCTION	Flexible LED Tape
LENGTH	Built to Order
LISTING	Dry or Wet (IP65) Location UL2108, CSA C22.2 #9 UL8750, CSA250
INSTALLATION	Link to Installation Instructions
ELECTRICAL	
DIMMING	Forward Phase, 0-10V, Lutron, DALI
MAXIMUM RUN (Based on 5 Amps)	18' (6W), 21' (5W), 21' (4W), 33' (3W), 36' (2W)
MAXIMUM RUN (Based on 4 Amps for Class II)	14' (6W), 17' (5W), 21' (4W), 26' (3W), 36' (2W)
VOLTAGE	24VDC
DRIVER	Remote (Sold Separately)
TEMPERATURE RATINGS	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)

LPL8150

ACCENT
& COVE

PROJECT



SINGLE
BIN
+30K




✓ **TM-30**
✓ **LM-79**
✓ **LM-80**



TYPE

LIGHTSTRIP, EXTRUSION, & LENS

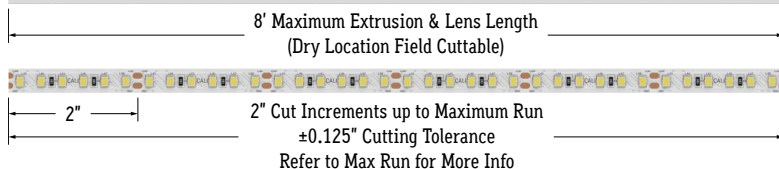


LAMP SPECIFICATIONS


LAMP NUMBER	CORRELATED COLOR TEMPERATURE	EFFICACY (LUMENS / WATT)	JA8	L70 LED LIFE
2.4K	2400K Incandescent White	90	Yes	60,000 hrs.
2.7K	2700K Warm White	90	Yes	60,000 hrs.
3.0K	3000K Warm White	90	Yes	60,000 hrs.
3.5K	3500K Neutral White	90	Yes	60,000 hrs.
4.0K	4000K Neutral White	90	Yes	60,000 hrs.
4.5K	4500K Neutral White	90	No	60,000 hrs.

Consult factory for cooler white color temperatures.

END VIEWS (Lightstrip Only)




Dry Location
(2W, 3W)



Dry Location
(4W, 5W, 6W)



Wet Location
(2W, 3W, 4W)



Wet Location
(5W, 6W)

ACCESSORIES

LED Tape Only: See Page 4
(Click on Accessory Image for Additional Information)

Channel Options: See Page 2 or 3
(Click on Channel Image to Open Individual Submittal with All Accessories)

Series			Lens / Optics	Watts per Foot	Dimming	CCT LED	Listing	Finish	Fixture Length
LPL8150- ^{*3}	LPL8150-OL	LPL8150-UC ^{*3}	Clear Lens ^{*2} (CL)	2 Watts (2W)	Forward / Reverse Phase (PH)	2400K (2.4K)	Indoor (DRY)	Natural Silver ^{*1} (NA)	Specify Length in Feet & Inches Example: 7'8"
LPL8150-CMC	LPL8150-RC	LPL8150-UCS		3 Watts (3W)	0-10V: 100% - 1% (10V)	2700K (2.7K)			
LPL8150-CMI	LPL8150-RCR	LPL8150-VR	50% Semi-Frosted Lens (SF)	4 Watts (4W)	Hi-Lume 1% 2 Wire ^{*5} (LTEA)	3000K (3.0K)	Outdoor IP65 ^{*10} (WET)	Polished (PA)	
LPL8150-CR	LPL8150-RME	LPL8150-WMC		5 Watts (5W)	Hi-Lume 1% 3 Wire ^{*6} (L3DA)	3500K (3.5K)			
LPL8150-EMI	LPL8150-RMI	LPL8150-WMI	100% Frosted Lens (F)	6 Watts (6W)	Hi-Lume Premier 0.1% JA8 ^{*7} (L3D0)	4000K (4.0K)		White	
LPL8150-GLL	LPL8150-RPM	LPL8150-WMR			JA8 0-10V (JA8-10V)	4500K (4.5K)		White (WH)	
LPL8150-GRL	LPL8150-SMI				JA8 Hi-Lume 1% 2 Wire (JA8-LTEA)			Satin / Silver	
LPL8150-L ^{*4}	LPL8150-SQC				DMX-512 ^{*8} (DMX)			(SA)	
LPL8150-LDS	LPL8150-SQL				DALI ^{*9} (DALI)			Black	
LPL8150-LPL	LPL8150-SR				Leave Blank for Non-Dimming			(BK)	
LPL8150-LPR	LPL8150-SRT								
LPL8150-MI	LPL8150-ST								
LPL8150-MW	LPL8150-STL								
See Page 3 and 4 for Channel Details									

See Page 3 and 4 for Channel Details

^{*1} Standard Finish: Natural Silver if left blank

^{*2} Standard Lens: Clear if left blank

^{*3} No lens, optics, or finish available

^{*4} If lens option is selected without a channel selection, "L" channel will be supplied

^{*5} (LTEA) 40 watt max Lutron Hi-Lume 1% 2 Wire #LTEA4U1UKL-CV240

^{*6} (L3DA) 40 watt max Lutron Hi-Lume 1% 3 Wire #L3DA4U1UKL-CV240

^{*7} (L3D0) 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U

^{*8} Consult third party DMX commissioner to modify at time of installation.

^{*9} DALI commissioning to be performed by a third party.

CALI does not provide DALI commissioning.

^{*10} Run lengths required for Wet Location products

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLITE™
Commercial Grade













CALIFORNIA
ACCENT
LIGHTING
INC

LPL8150 | ACCENT
& COVE






SURFACE MOUNT (Click on Product Thumbnail to See Individual Submittal)

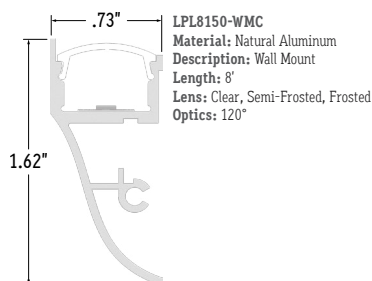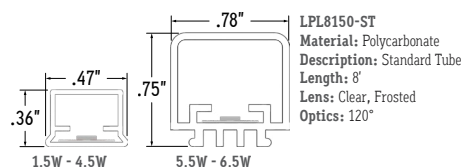




CORNER MOUNT (Click on Product Thumbnail to See Individual Submittal)

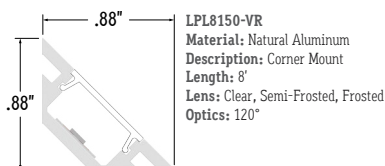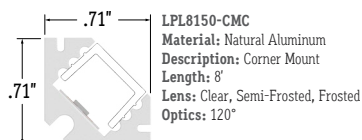

PENDANT MOUNT (Click on Product Thumbnail to See Individual Submittal)

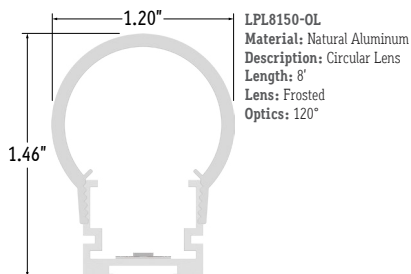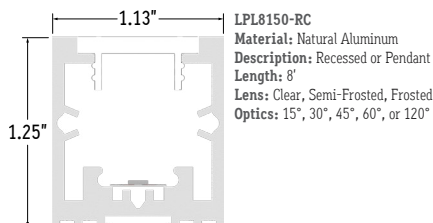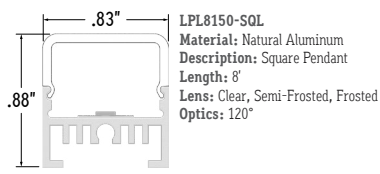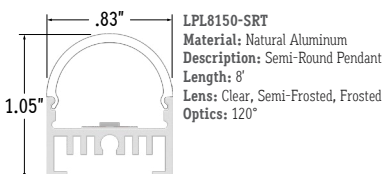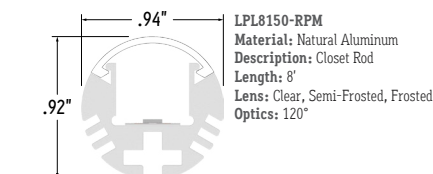

GLASS MOUNT (Click on Product Thumbnail to See Individual Submittal)

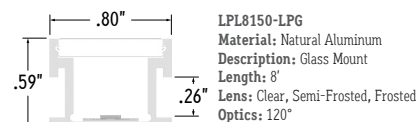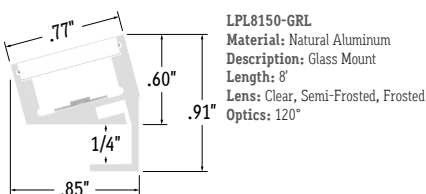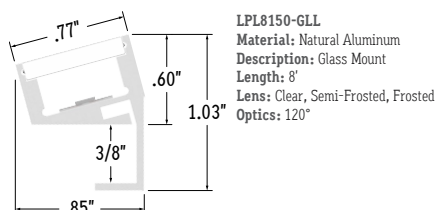

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806







ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.









lipLITE™
Commercial Grade



RECESS MOUNT (Click on Product Thumbnail to See Individual Submittal)

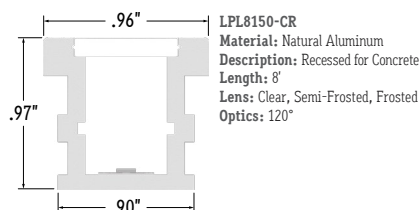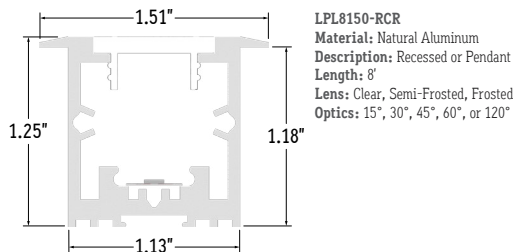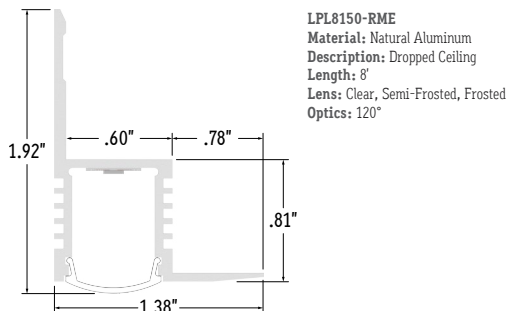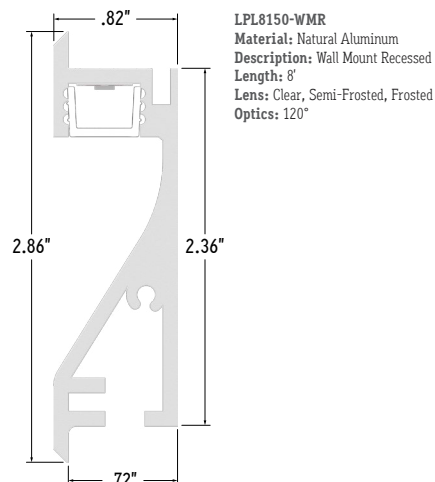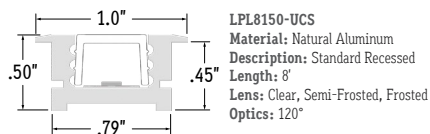

MUD-IN (Click on Product Thumbnail to See Individual Submittal)

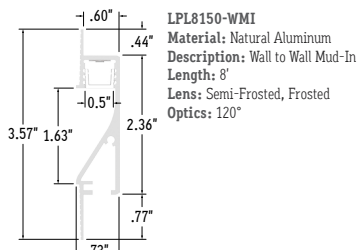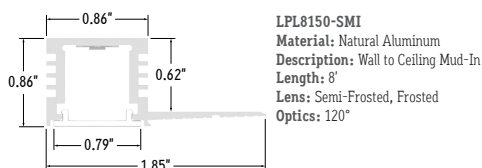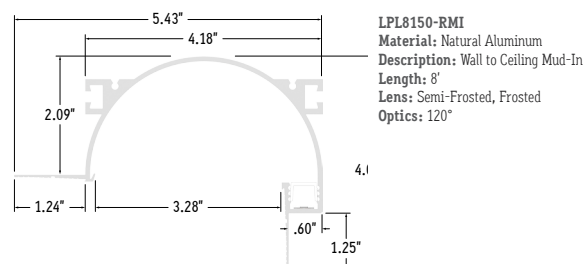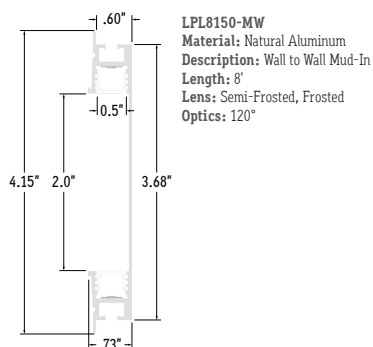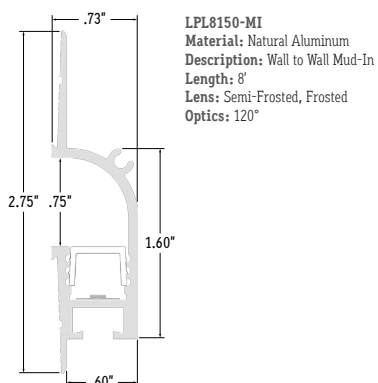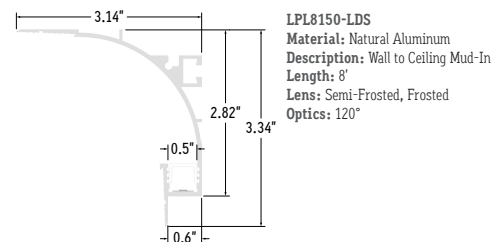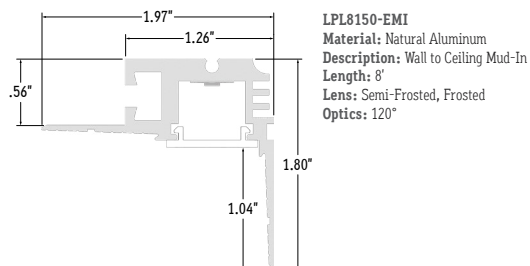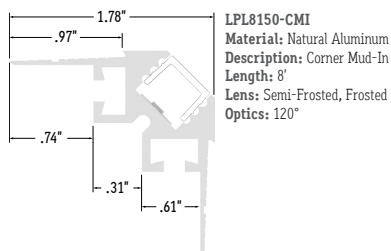

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.


lipLITE™
Commercial Grade



ACCESSORIES (Sold Separately)




Power Connector Dry (20/2 Gauge Wire)
LPL8150-PC (33" Standard)
LPL8150-PC-X (X = Specify Length)



Continuous Connector Dry (20/2 Gauge Wire)
LPL8150-CC (3" Standard)
LPL8150-CC-X (X = Specify Length)

Note: Connector type subject to change without notice
Note: Connectors available with black or white jacket.
Click on image to see cut sheet for details.




Wet Splice Connector
(LPL8150-SC-WET)

PART NUMBER	WEIGHT	SPECIFY FINISH	SPECIFY LENGTH	SPECIFY QUANTITY	UNIT
LPL8150-CC-X*	Varies by Length				Each
LPL8150-PC-X*	Varies by Length				Each
LPL8150-SC-WET	0.009 lbs each	N/A	N/A		Each
LPL8150-MCS	0.0031 lbs	N/A	N/A		Each
LPL8150-MCS-WET	0.0051 lbs	N/A	N/A		Each
LPL8150-UC	0.061 lbs per foot	N/A			Each
LPL8150-UC-CP	0.0008 lbs	N/A	N/A		Each


*Leave blank for Standard option

MOUNTING OPTIONS (Sold Separately)


Click image to view installation information




Mounting Clip (Dry Location)
(LPL8150-MCS)



Mounting Clip (Wet Location)
(LPL8150-MCS-WET)

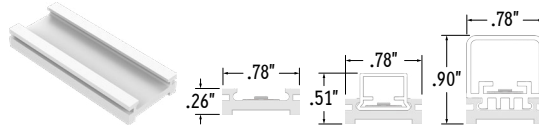

Mounting Channel (Dry or Wet Location)
(LPL8150-UC)



Channel Clip (Dry Location)
(LPL8150-UC-CP)

DESIGN GUIDELINES


Individual Run (Up to Max Run)



Runs with Continuous Connector (Dry Location)




Continuous Run (Wet Location)

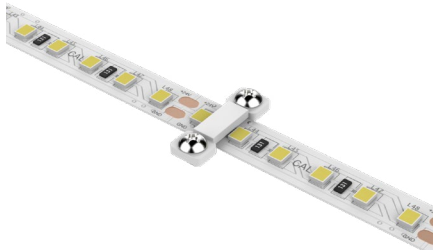

Detail A
Mounting Clip (Tape Only - Dry Location)
(LPL8150-MCS)



Detail B
Continuous Connector (Dry Location)
(LPL8150-CC)

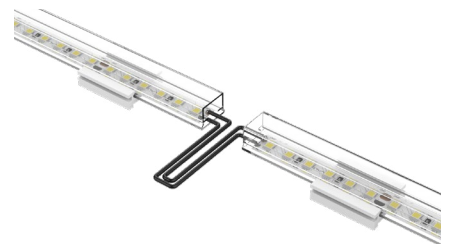

Detail C
Continuous Connection
(Wet Location)

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

lipLITE™
Commercial Grade

