

marketLITE™ SERIES



A PLEASANT SOLUTION FOR THE OUTDOORS

Our *marketLITE*™ series is an excellent choice for illuminating large areas, or as accent/decorative lighting. This 120V AC system offers long life, energy-efficient LEDs, that provide a pleasant mood to outdoor venues, restaurant interiors, patios, and many more.

VOLTAGE

120V

LISTED PERMANENT INSTALLATIONS

Hard Wire | Power Plug

DIMMING

Forward Phase

DARK SKY COMPLIANT

BUG Rating B0-U0-G0

BUG Rating B0-U1-G0

BUG Rating B0-U2-G1

FIELD-CUTTABLE

DUAL AIRCRAFT CABLE FOR SAFETY



CALI
CALIFORNIA ACCENT LIGHTING INC
Lighting for the Professional Designer




Mission Library- San Antonio, TX

FEATURES AND PERFORMANCE

Our *marketLITE™* series is an excellent choice for illuminating large areas, or as accent/decorative lighting. This 120V system offers fast and easy installation, long-life, energy-efficient LEDs, that provide a pleasant mood to outdoor venues, restaurant interiors, patios, etc.

Don't have exact field dimensions? No problem. Once measurements are finalized, *marketLITE™* can be easily field cut and installed by attaching special hooks on the lamp sockets to an aircraft cable or eye-hooks.


Chromaticity Diagram

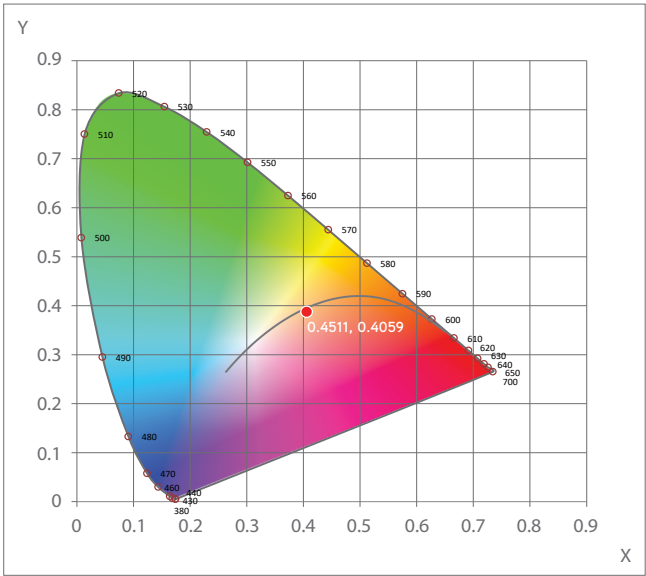

LED SPECIFICATIONS

LAMP	DESCRIPTION	COMPATIBLE SHAPES
2.4K	2400K Incandescent White	GSFL
2.7K	2700K Warm White	GSF, GSFL, SSF, SSC
3.0K	3000K Warm White	GSFL
5.0K	5000K Cool White	GSF, GSFL, SSF, SSC
A	Amber	SSC, GSF
R	Red	SSC, GSF
G	Green	SSC, GSF
B	Blue	SSC, GSF

Polar Graph

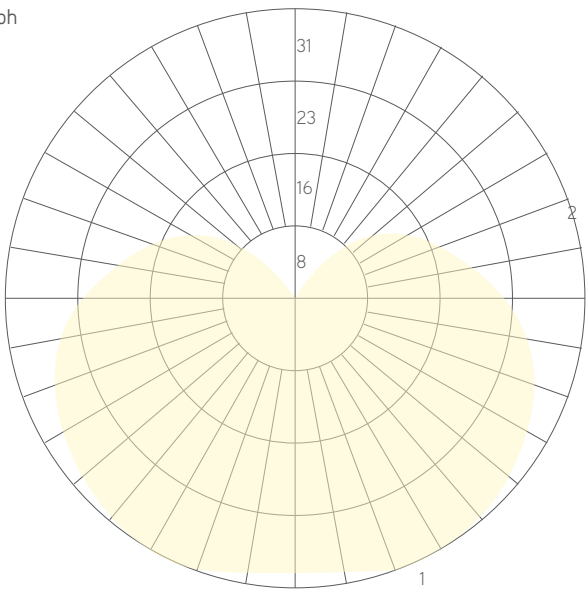

Lamp Tested:
#GSFL LED Filament Shape
Clear 3W
256 Lumens
CRI 80

FEATURES

APPLICATIONS	Indoor and Outdoor
LAMP	LED Lamp (Included)
LED LAMP LIFE	20,000 Hours
LENGTH	Built to Order
FINISH	Black
FEED	Standard 6' Power Lead
STRAIN RELIEF	Cable (Included, Not for Mounting)
MOUNTING	Mounting Aircraft Cable (Sold Separately)
LISTING	Dry or Wet Location ANSI/UL1598, CSA 22.2 No. 250.0-04, 2nd Edition UL2108, CSA C22.2#9
OPTIONS	Mesh, Canopies, or Cages
UV RATING	Sun Light Resistance
BUG RATING	B0-U1-G0 Dark Sky Compliant*1

ELECTRICAL

DIMMING	Forward Phase
MAXIMUM RUN	250' Without Canopies, 100' With Canopies
VOLTAGE	120V
SYSTEM	20 Amps (12 Gauge Wire)
WATTS	1W or 3W Lamps

*1 Standard Canopy Inside / Outside Finish is Black (BK).
See individual submittal for other finish options.

marketLITE™ SERIES

ML2000 | marketLITE




ML2000-CB | Canopy B




ML2000-CA | Canopy A




ML2000-CACA | Canopy A with Cage




ML2000-CAH | Canopy AH

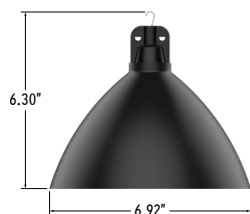


ML2000-CC | Canopy C




ML2000-CCCA | Canopy C with Cage



ML2000-CM | Canopy M

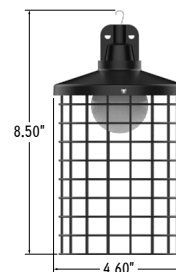

ML2000-CMH | Canopy MH

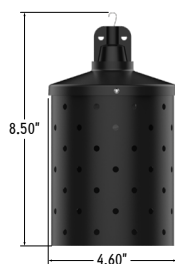

ML2000-CW | Canopy W



HOW TO ORDER OR SPECIFY

SERIES	SPACING	LAMP	DIMMING	LISTING	CANOPY FINISH INSIDE ^{*2}	CANOPY FINISH OUTSIDE ^{*2}	FIXTURE LENGTH
ML2000	12" O/C (12")	2.7K-GSF 5.0K-GSFL	Forward Phase (DM)	Indoor (DRY)	Natural (NA)	Natural (NA)	Specify Length in Feet Example: 100'
ML2000-CA ^{*1}	18" O/C (18")	5.0K-GSF 2.7K-SSF	Leave Blank for Non-Dimming	Outdoor (WET)	Polished (PA)	Polished (PA)	
ML2000-CACA ^{*1}	24" O/C (24")	A-GSF 5.0K-SSF			White (WH)	White (WH)	
ML2000-CAH ^{*1}	36" O/C (36")	R-GSF 2.7K-SSC			Black (BK)	Black (BK)	
ML2000-CB ^{*1}	48" O/C (48")	G-BSF 5.0K-SSC			Green (GN)	Green (GN)	
ML2000-CC ^{*1}	60" O/C (60")	B-GSF A-SSC			Bronze (BR)	Bronze (BR)	
ML2000-CCCA ^{*1}		2.4K-GSFL R-SSC			Silver (SR)	Silver (SR)	
ML2000-CM ^{*1}		2.7K-GSFL G-SSC			Red (RD)	Red (RD)	
ML2000-CMH ^{*1}		3.0K-GSFL B-SSC					
ML2000-CW ^{*1}							

^{*1} Standard Canopy Inside / Outside Finish is Black (BK). See individual submittal for other finish options.

^{*2} Standard Canopy Finish: Black (BK) if unspecified.

LAMP SHAPES

G Shape
(GSF)



Material: Polymer Plastic
Appearance: Frosted
Lamp Watts: 1W
Lamp Life: 20,000 hrs.
Lamp Type: Standard LED
Lumens: 42
Beam Angle: 360°
Temperatures: 2.7K, 5.0K

Filament G Shape
(GSFL)



Material: Glass
Appearance: Clear
Lamp Watts: 3W
Lamp Life: 25,000 hrs.
Lamp Type: Filament LED
Lumens: 256
Beam Angle: 360°
Temperatures: 2.4K, 2.7K, 3.0K, 5.0K

S Shape
(SSF)




Material: Polymer Plastic
Appearance: Frosted
Lamp Watts: 1W
Lamp Life: 20,000 hrs.
Lamp Type: Standard LED
Lumens: 42
Beam Angle: 360°
Temperatures: 2.7K, 5.0K

S Shape
(SSC)




Material: Polymer Plastic
Appearance: Clear, Textured
Lamp Watts: 1W
Lamp Life: 20,000 hrs.
Lamp Type: Standard LED
Lumens: 42
Beam Angle: 360°
Temperatures: 2.7K, 5.0K, A, R, G, B

ACCESSORIES (SOLD SEPARATELY)




Power Plug
(ML2000-PP)



End Cap
(ML2000-EC)


MOUNTING ACCESSORIES (SOLD SEPARATELY)



Mounting Plate
(ML2000-MP)




Cable Lock
(ML2000-CL-1/8'')

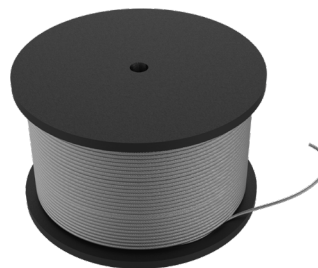


Mounting Aircraft Cable
(ML2000-AC-1/8'-X)
(X = Specify Length)

DESIGN GUIDELINES


Option A - Zig Zag Runs

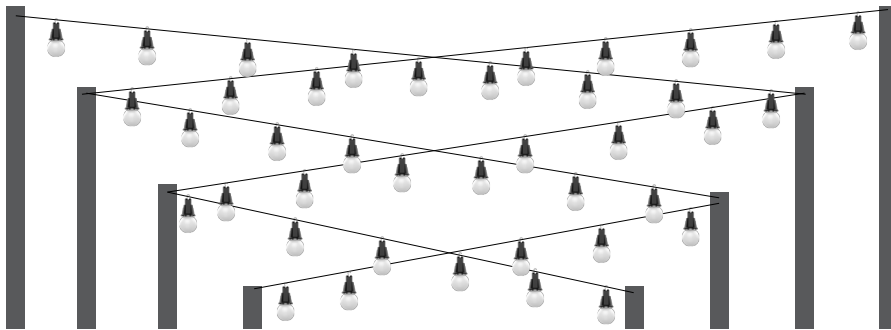

Option B - Crossed Runs

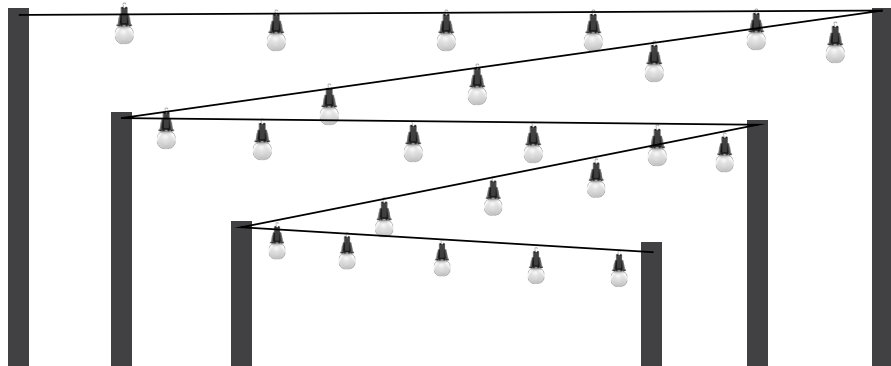


Option C - Straight Runs

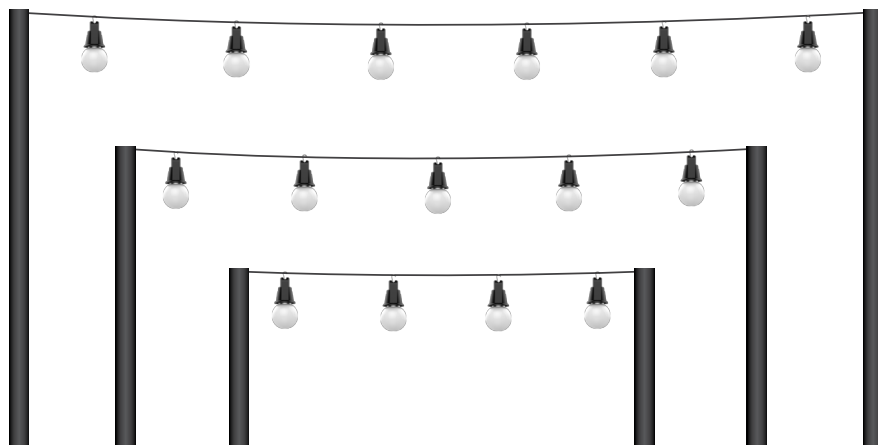

DESIGNS

Straight



Sway




INSTALLATION OPTIONS

Building to Building




Building to Pole




Pole to Pole




Tree to Tree

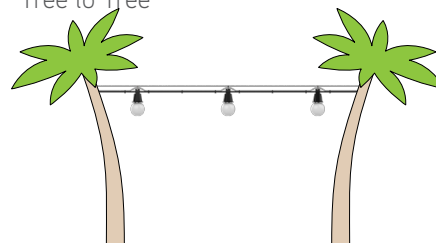

Hardwire Installation (Wet Location)

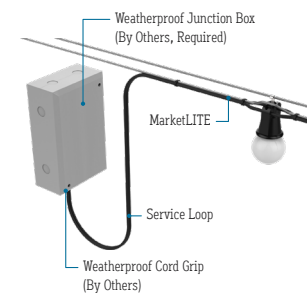

Power Plug (Wet Location)

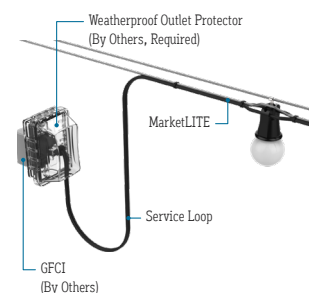





CALI

CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

