


## Perspective View



## WET LOCATION

1. Measure area where luminaire will be installed. Use a laser line to ensure a straight installation.
2. Mark location where mounting stakes will be installed along chalk line.
3. Use 2 mounting stakes per fixture.  
**Example:**  $4' + 4' + 2' = 2 \text{ MC} + 2 \text{ MC} + 2 \text{ MC} = 6 \text{ MC}$  total.  
Push fixtures together at each connection until end caps touch.
5. Ensure each stake is secure in place, then snap fixture into mounting clips.
6. If applicable, connect disconnects between luminaires. Slide shrink tube over connectors and apply heat. The shrink tube will shrink down, sealing the connectors. Apply silicone around sealed connectors for a stronger seal.

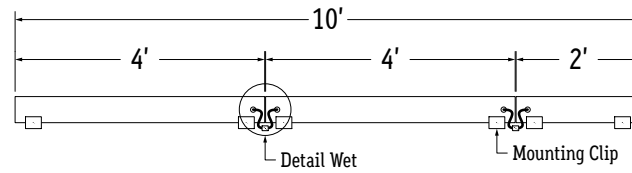

4. Insert stakes into ground until entire tapered portion is submerged.  
**Note:** The ground must be dense enough to support the weight of the fixtures.

